




# Cordless Impact Driver DTD154Z



High rotational speed  
**3,600r/min**

Optimum for fast tightening of self-drilling screws

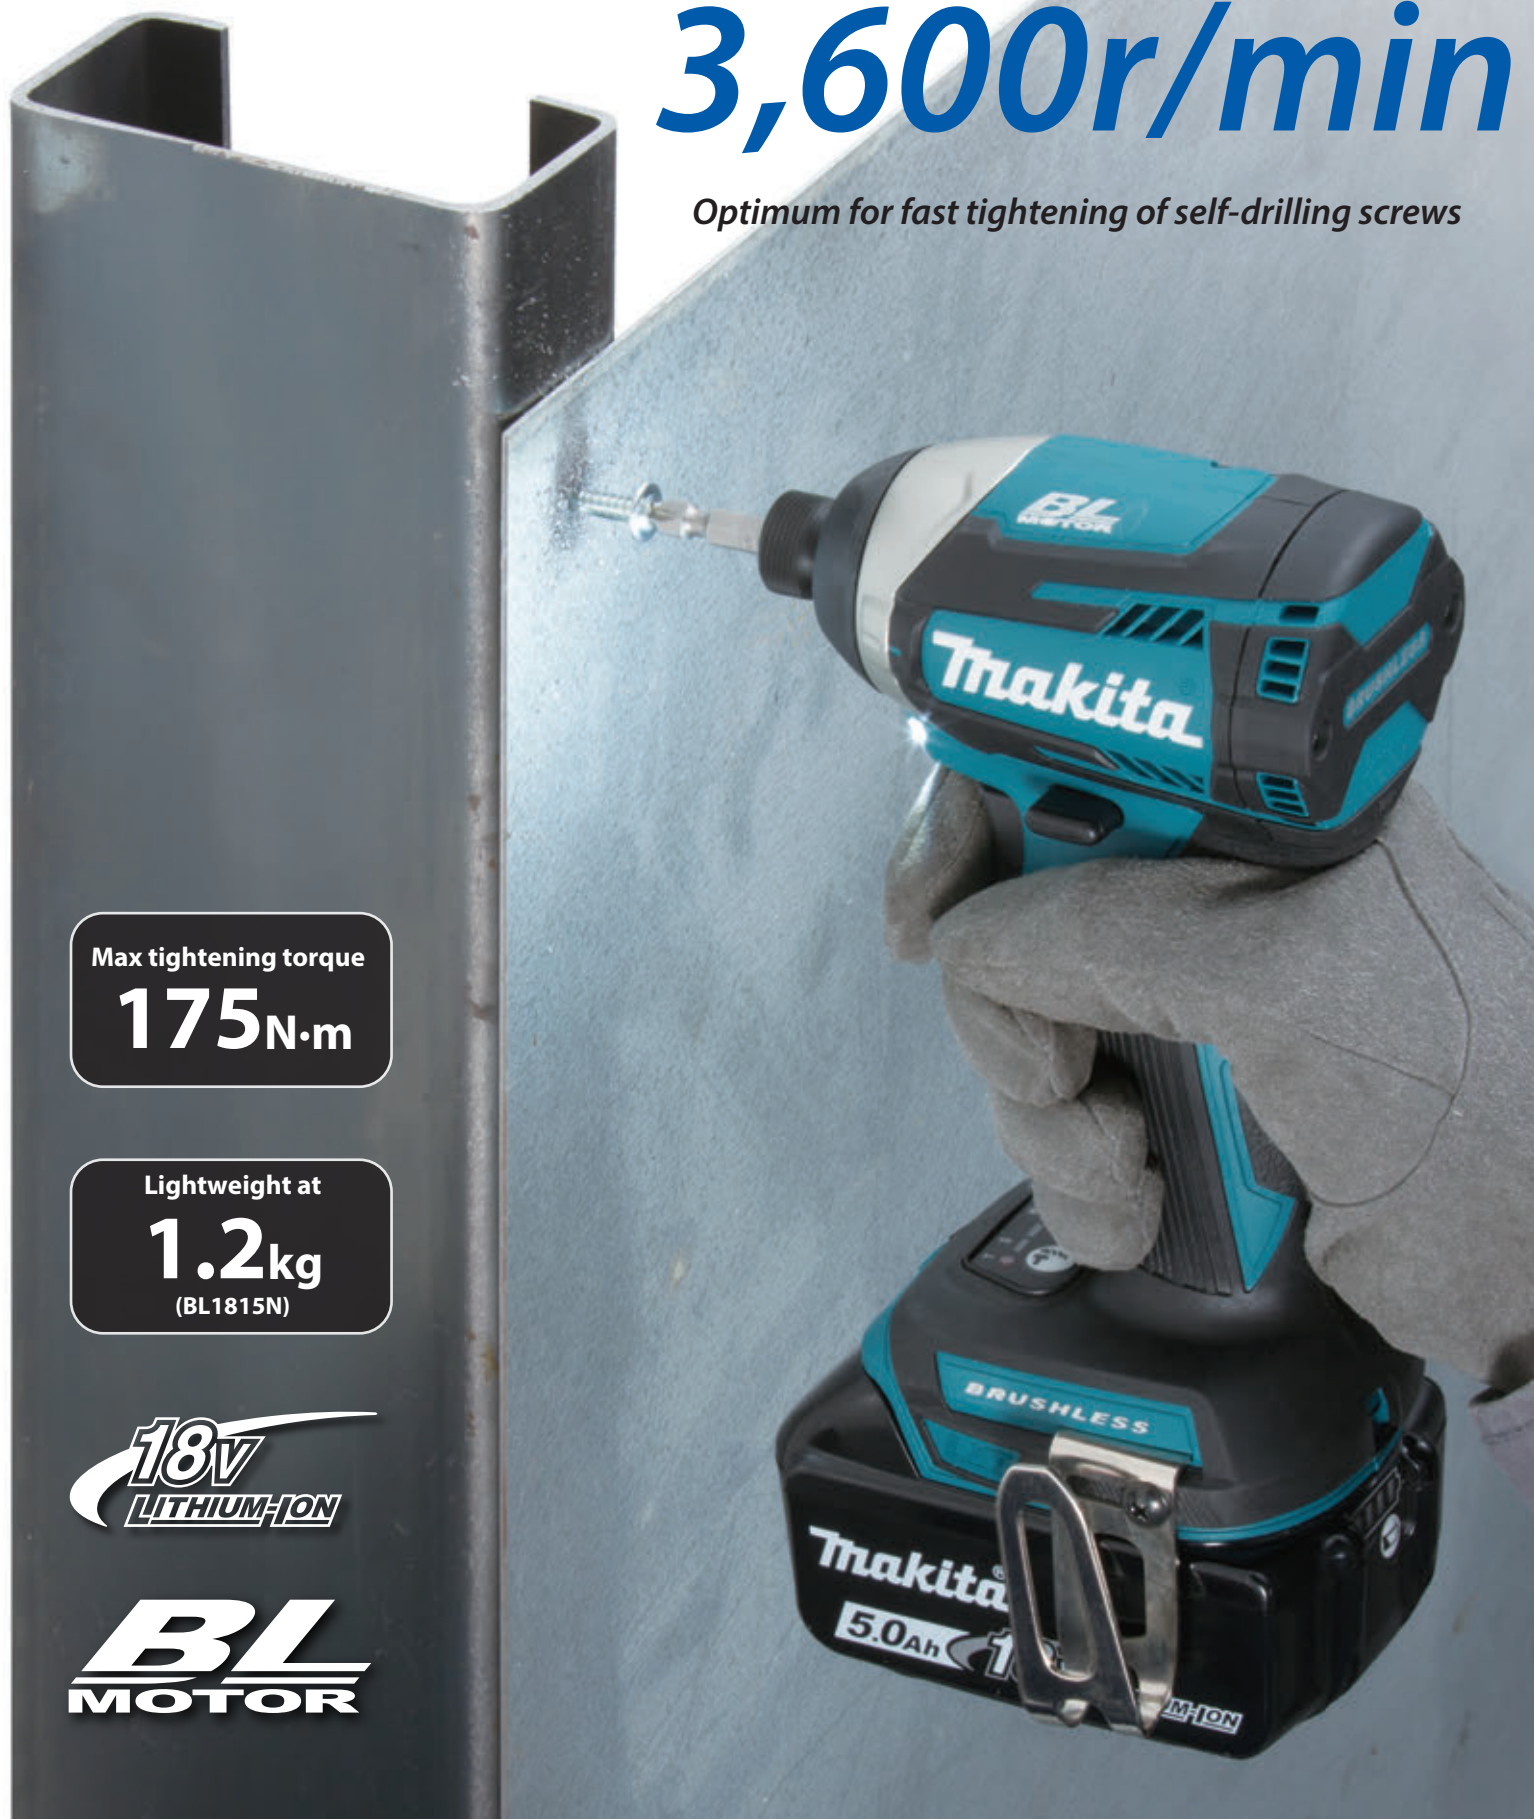

Max tightening torque

**175N·m**

Lightweight at

**1.2kg**  
(BL1815N)



**Aluminum hammer case**  
creates impression of rigidity of the machine.

**One-touch bit installation**  
(For some countries only)  
No need to pull bit sleeve for bit installation

**Twin LED Job light with pre-glow and afterglow functions**



**Electronic 3 stage impact power selection**  
In order to reduce fault tightening, hard/medium/soft impact power can be selected to the material of workpiece or screw type simply by pushing a button.

**T-mode:**

**Tightening mode for self-drilling screw**  
T-mode is a special mode optimum for fast tightening of self drilling screws without damaging the screw and the workpiece.



**Variable speed control by trigger**

**Ergonomically designed handle with soft grip**  
provides comfortable grip and more control while minimizing hand fatigue and pain.

**Powered by 18V Li-ion batteries**






**Belt clip**



**Battery / Charger (not included)**

<p>with Battery fuel gauge</p>  <p>*without Battery fuel gauge</p>		<p>BL1860B (6.0Ah) BL1850B (5.0Ah) BL1830B (3.0Ah) *BL1815N (1.5Ah)</p>	<p>Fast charger DC18RC</p> 
---	---	---	--

**Cordless Impact Driver**  
**DTD154Z**

<ul style="list-style-type: none"> <li> Variable Speed</li> <li> Brake</li> <li> Reversing</li> <li> Electronic 3-Speed</li> <li> Built-in Job Light</li> </ul>	<table border="0"> <tr> <td style="vertical-align: top;"><b>Capacity</b></td> <td style="vertical-align: top;"> <p>Machine screw: M4 - M8 Standard bolt: M5 - M16 High strength bolt: M5 - M14 Coarse thread (in length): 22 - 125mm</p> </td> </tr> <tr> <td style="vertical-align: top;"><b>Impacts per minute (i/min)</b></td> <td style="vertical-align: top;">0 - 3,800 / 0 - 2,600 / 0 - 1,100</td> </tr> <tr> <td style="vertical-align: top;"><b>No load speed (r/min)</b></td> <td style="vertical-align: top;">0 - 3,600 / 0 - 2,100 / 0 - 1,100</td> </tr> <tr> <td style="vertical-align: top;"><b>Max. fastening torque</b></td> <td style="vertical-align: top;">175 N·m</td> </tr> <tr> <td style="vertical-align: top;"><b>Vibration Level</b></td> <td style="vertical-align: top;">12.5 m/s<sup>2</sup></td> </tr> <tr> <td style="vertical-align: top;"><b>Sound Pressure Level</b></td> <td style="vertical-align: top;">96 dB(A)</td> </tr> <tr> <td style="vertical-align: top;"><b>Sound Power Level</b></td> <td style="vertical-align: top;">107 dB(A)</td> </tr> <tr> <td style="vertical-align: top;"><b>Dimensions (L x W x H)</b></td> <td style="vertical-align: top;">117x79x236mm</td> </tr> <tr> <td style="vertical-align: top;"><b>Net weight</b></td> <td style="vertical-align: top;">BL1850B: 1.5kg BL1815N: 1.2kg</td> </tr> </table>	<b>Capacity</b>	<p>Machine screw: M4 - M8 Standard bolt: M5 - M16 High strength bolt: M5 - M14 Coarse thread (in length): 22 - 125mm</p>	<b>Impacts per minute (i/min)</b>	0 - 3,800 / 0 - 2,600 / 0 - 1,100	<b>No load speed (r/min)</b>	0 - 3,600 / 0 - 2,100 / 0 - 1,100	<b>Max. fastening torque</b>	175 N·m	<b>Vibration Level</b>	12.5 m/s <sup>2</sup>	<b>Sound Pressure Level</b>	96 dB(A)	<b>Sound Power Level</b>	107 dB(A)	<b>Dimensions (L x W x H)</b>	117x79x236mm	<b>Net weight</b>	BL1850B: 1.5kg BL1815N: 1.2kg
<b>Capacity</b>	<p>Machine screw: M4 - M8 Standard bolt: M5 - M16 High strength bolt: M5 - M14 Coarse thread (in length): 22 - 125mm</p>																		
<b>Impacts per minute (i/min)</b>	0 - 3,800 / 0 - 2,600 / 0 - 1,100																		
<b>No load speed (r/min)</b>	0 - 3,600 / 0 - 2,100 / 0 - 1,100																		
<b>Max. fastening torque</b>	175 N·m																		
<b>Vibration Level</b>	12.5 m/s <sup>2</sup>																		
<b>Sound Pressure Level</b>	96 dB(A)																		
<b>Sound Power Level</b>	107 dB(A)																		
<b>Dimensions (L x W x H)</b>	117x79x236mm																		
<b>Net weight</b>	BL1850B: 1.5kg BL1815N: 1.2kg																		

weight according to EPTA-Procedure 01/ver.2.1  
Items of standard equipment and specifications may vary by country or area.

**Battery and Charger Not Included!**