



Please see www.makita.co.za for detailed information on the shape, size, recommended use and material of each blade.

Cutting (plunge cutting)



Applications:
Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.
Benefits:
• Different from jig saws, etc, able to make a plunge cut in the wall for electrical connection box, lighting, exhaust fan, etc.
• The blade can be positioned in twelve different angles to allow easy operation in tight spaces.

Cutting



Applications:
Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.
Benefits:
• Able to perform long distance push cut.
• The segment shape allows flush cutting.

Sanding



Applications:
Wood sanding, concrete sanding, or paint removal, etc. with a variety range of abrasive papers.
Benefits:
• Able to sand in corners.
• Connectable to vacuum cleaner with optional dust extraction system.

Removing grout/ Cutting tiles



Applications:
Replacing broken wall or floor tile.
Benefits:
• Less amount of dust scattering thanks to oscillating action.
• The segment shape allows flush cutting.

Scraping



Applications:
Removing mortar, tile adhesive, hardened glue, window putty, caulking, paint, etc.
Benefits:
Low-profile blade with a narrow tip allows easy removal of caulking, window putty, etc.

Multi Tool TM3000CX2 459 mm



TM3000CX2 includes:



Continuous rating Input	320W
Oscillations per minute (opm)	6,000-20,000
Dimensions (L x W x H)	275x64x92mm
Net Weight*	1.4kg
Power supply cord	5.0m

- Double Insulation
- Variable Speed
- Constant Speed
- Soft Start

Standard Equipment : Hex Wrench *weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

TM3000CX2 is supplied with the following standard accessories:

- Segment Saw Blade (Wood and Metal - Suitable for flush cutting) Diameter 85mm
- Segment Saw Blade (Wood - Suitable for flush cutting) Diameter 85mm
- Plunge Cutting Saw Blade (Wood and Metal - Suitable for deep plunge cutting in wood) Size (W x L) 28mm x 50mm
- Plunge Cutting Saw Blade (Hard Wood) Size (W x L) 32mm x 40mm
- Plunge Cutting Saw Blade (Wood) Size (W x L) 32mm x 40mm
- Plunge Cutting Saw Blade (Metal - Suitable for flush cutting in nails or plasterboard) Size (W x L) 10mm x 20mm
- Abrasive Paper Delta Red 60
- Abrasive Paper Delta Red 100
- Abrasive Paper Delta Red 150
- Adapter A



Tel: JHB (011) 878 2600 CPT (021) 932 0568 DBN (031) 717 6400
www.makita.co.za

Rutherford is not responsible for printing errors. (E & OE)



Multi Tool TM3000CX2

EXTRA VERSATILE



Compatible with all OIS (Oscillating Interface System) accessories



Oscillating Multi Tool



Wide selection of accessories available for various applications





Cutting PVC, FRP pipes



Cutting metals



Wood flush cutting



Wood plunge cutting



Deep plunge cutting



Sanding and polishing various materials




Cutting tiles



Removing mortar, tile adhesive




Routing joints on wall tiles

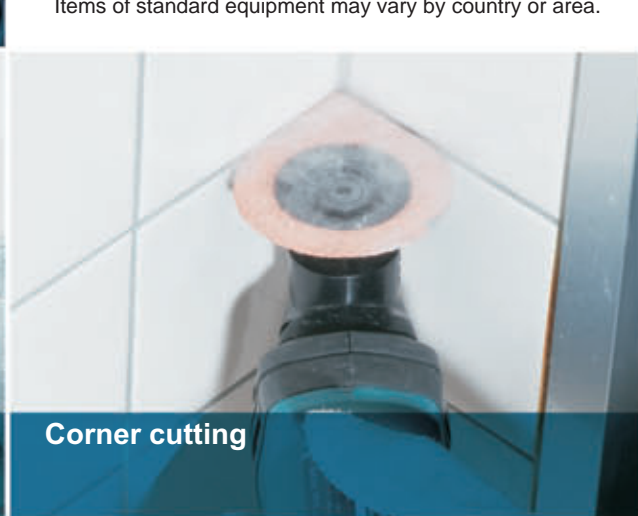

Corner cutting



Cutting window putty, silicone

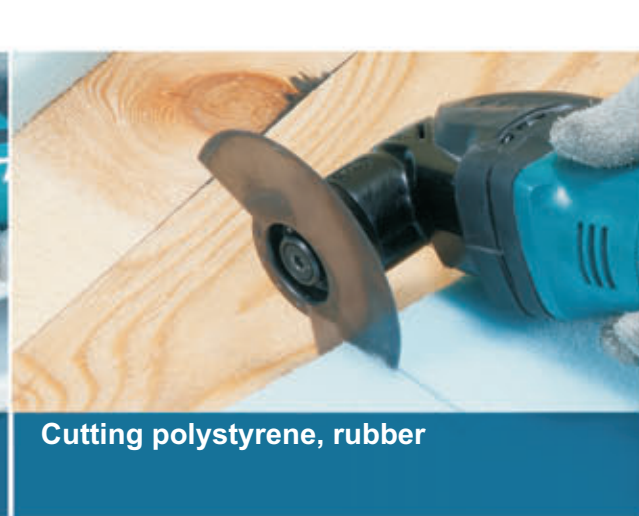

Cutting polystyrene, rubber



Scraping floor tiles

High operation efficiency

Oscillations per minute: up to 20,000 min⁻¹
Oscillating angle: 3.2°

Soft start

allows accurate landing of the blade on the surface of workpiece in various applications.

Constant speed control

Multi angle setting



Fully 360° multi angle setting enables users to position accessories in 12 different angles (each 30°) to allow access to tight spaces for optimum maneuverability.

Dust extraction system (Option)



Dust extraction system is available as an option for aggressive dust removal in applications with sanding pad.



Ergonomically best possible barrel grip

Variable speed control by dial

Hex wrench holder

Items of standard equipment may vary by country or area.



Cutting plasterboards



Metal flush cutting



Flush cutting of nails



Accessories for TM3000CX2 Multi Tool

Sawing Round and segment saw blades				
No.	Shape	Application/ Recommended Use	Dia. (mm)	Material of Blade
B-21272 TMA001		Non-ferrous metal, FRP, PVC Suitable for corners.	85	BiM-TiN
B-21288 TMA002		Non-ferrous metal, FRP, PVC Suitable for corners.	65	BiM-TiN
B-21294 TMA003		Non-ferrous metal, FRP, PVC	85	BiM-TiN
B-21319 TMA005		Wood&Metal Suitable for deep cutting	100	Bi-Metal
B-21325 TMA006		Wood&Metal Suitable for flush cutting	85	Bi-Metal
B-21331 TMA007		Wood Suitable for flush cutting	85	HCS

RIFF segment saw blades				
No.	Shape	Application/ Recommended Use	Dia. (mm)	Material of Blade
B-21490 TMA023		Routing joints on wall tiles	85	HM grit #30
B-21521 TMA026		Routing joints on wall tiles Cutout of soft wall tiles and FRP	85	Diamond grit #40



Cutting PVC, FRP pipes

TMA001-TMA003



Cutting metals

TMA001-TMA006



Wood flush cutting

TMA005-TMA007



Routing joints on wall tiles

TMA023, TMA026



Cutting tiles

TMA026



Accessories for TM3000CX2 Multi Tool

Plung-cutting saw blades				
No.	Shape	Application/ Recommended Use	Size (W x L)	Material of Blade
B-21347 TMA008		Wood and nails Suitable for plunge cutting	65 x 40	Bi-Metal
B-21369 TMA010		Hard Wood	32 x 40	Bi-Metal
B-21381 TMA012		Wood	32 x 40	HCS
B-21397 TMA013		Wood	20 x 30	HCS
B-21412 TMA015		Metal Suitable for flush cutting in nails or copper pipe	32 x 30	Bi-Metal
B-21428 TMA016		Metal Suitable for flush cutting in nails or copper pipe	20 x 20	Bi-Metal
B-21434 TMA017		Metal Suitable for flush cutting in nails or plasterboard	10 x 20	Bi-Metal



Flush cutting of nails

TMA015-TMA017



Wood plunge cutting

TMA008-TMA013



Deep plunge cutting

TMA008-TMA013



Metal flush cutting

TMA008, 015-017



Cutting plasterboards

TMA008-TMA017



Cutting copper pipe

TMA015, TMA016



Accessories for TM3000CX2 Multi Tool



Cutting polystyrene, rubber

TMA021



Removing mortar, tile adhesive

TMA022

Cutting		Cutting blades		
No.	Shape	Application/ Recommended Use	Size (W x L)	Material of Blade
B-21478 TMA021		Cutting window putty or silicone	28 x 50	HCS



Cutting window putty, silicone

TMA021

Routing and Rasping		RIFF routing and removing blades		
No.	Shape	Application/ Recommended Use	Dia. (mm)	Material of Blade
B-21484 TMA022		Removing grout or mortar Routing joints on floor tiles	70	HM grit #40

Riff sanding plate				
No.	Shape	Application/ Recommended Use	Dia. (mm)	Material of Blade
B-21515 TMA025		Removing mortar or tile adhesive	78	HM grit #30



Corner cutting

TMA022



Accessories for TM3000CX2 Multi Tool

Wood / long-life

Suitable for sanding wood, hardwood, chipboard, construction boards and metal



Paper Size (mm)	Grit	Per pkg.	Part No.
93	60,80,100,120,180	10 (2pcs/each)	B-21559

Wood

Suitable for sanding wood and wooden materials



Paper Size (mm)	Grit	Per pkg.	Part No.
93	60	10	B-21624
93	80	10	B-21630
93	100	10	B-22947
93	120	10	B-21646
93	150	10	B-22953

Paint

Suitable for sanding paint, varnish or roughcast



Paper Size (mm)	Grit	Per pkg.	Part No.
93	60	10	B-21680
93	80	10	B-21696
93	100	10	B-21705
93	120	10	B-22969

Stone

Suitable for coarse to gloss sanding of extremely hard materials such as stone or glass



Paper Size (mm)	Grit	Per pkg.	Part No.
93	120	10	B-21749
93	240	10	B-21755

Fleece

Suitable for removing the rust of metal and the dirt of wood



Paper Size (mm)	Grit	Per pkg.	Part No.
93	100	1	B-21799
93	280	1	B-21808

Sanding Pad



Part No. B-21537



Sanding and polishing various materials

Dust extraction system (Dust attachment set)

Dust extraction system is available as an option for aggressive dust removal in applications with sanding pad.



Part No. 196022-7

