



2025

PRODUCT CATALOGUE



INDUSTRIAL POWER TOOLS

2		DML801	19	HM1307C	29
2012NB	37	DML802	19	HM1802	29
4		DML815	19	HM1812	29
4114S	28	DMP180Z	18	HP0300	33
4131	28	DP2010N	31	HP1630	33
4329K	35	DP4002	31	HP1640	33
4350FCT	35	DPB180ZK	10	HP2050	33
5		DPJ180ZJ	15	HP2051	33
5143R	27	DPT353Z	17	HP2070	33
5903RK	27	DRT50ZJ	18	HR2230	39
6		DRT50ZJX2	18	HR2475	40
6906	34	DRV250ZJ	17	HR2600	40
9		DS4012	31	HR2630	40
9031	26	DSP600ZJ	5	HR2631F	40
9032	25	DSS610ZJ	10	HR2670	40
9046	38	DST221Z	17	HR2670FT	40
9237CB	39	DTD152Z	13	HR2810	41
9403	26	DTD153ZJ	13	HR3200C	41
9557HNG	23	DTD154Z	13	HR4002	41
9558HP	23	DTD172ZJ	13	HR4003C	41
A		DTM50ZK	15	HR4013C	41
AF506	26	DTR180ZJ	16	HR5212C	41
AF601	27	DTW190ZK	14	HS0600	27
ADPO5	18	DTW251ZK	14	HS7601K	27
B		DTW300ZJ	14	J	
BL1815N	5/9	DTW700ZJ	14	JN1601	36
BL1830B	5/9	DTW1001ZJ	14	JN3201J	36
BL1850B	5/9	DTW1002ZJ	14	JR3061T	35
BL1860B	5/9	DUA301Z	6/46	JR3070CT	35
BO3710	38	DUB184Z	20/45	JS1601	36
BO4555	38	DUB185Z	11	JS1602	37
BO4900	38	DUB186Z	20/45	JS3201J	37
BO5031	38	DUB361Z	6/45	JV0600K	35
BO5041	39	DUB362Z	6/45	K	
BO6030	39	DUC302Z	6/45	KP0800K	37
BO6050J	39	DUC400Z	6/46	KP0810K	37
D		DUH523Z	21/47	L	
DA3010F	31	DUH651Z	7/47	LC1230N	28
DBO180Z	17	DUN461WZ	21/47	LD050P	36
DC18RC	13	DUR190LZX3	20/46	LD080PI	36
DC18RD	13	DUR192L	21/46	LS0815FLN	32
DC18SE	13	DUR193Z	20/46	LS1018LN	32
DCF102Z	18	DUR368AZ	7/47	LS1019L	32
DCG180ZK	11	DVC750L	19	LS1040N	32
DCL180Z	19	DWR180Z	13	LS1219L	32
DDA350ZK	11	F		LW1401	28
DGA452ZK	10	FS2300	42	M	
DGA456ZJ	10	FS2500	43	MLT100N	31
DGA458ZJ	10	FS2700	43	N	
DGA900ZK	5	FS4300	43	N5900B	27
DGD800Z	11	FS6300	43	P	
DGP180Z	17	G		PJ7000	26
DHP453RYE	11	GA4534	23	R	
DHP453ZK	11	GA4540	23	RP0900	42
DHP482RFE	12	GA4550	23	RP1800X	42
DHP482ZJ	12	GA5010	23	RP2301FCX	42
DHP484ZJ	12	GA5040	24	RT0700C	42
DHP458ZK	12	GA5040C	24	RT0700CX2J	42
DHP485ZJ	12	GA7010C	24	S	
DHP486ZJ	12	GA7020	24	SG1251J	28
DHR202ZK	16	GA9010C	24	SP6000J	28
DHR242ZJ	16	GA9020	25	T	
DHR263ZK	5	GA9020K	25	TM3000CX2	38
DHR400ZK	5	GA9040SK01	25	TW0200	34
DHS680ZJ	10	GA9050	24	TW0350	34
DHS710Z	5	GA9060	25	TW1000	34
DHW180Z	18	GD0600	30	U	
DJN161Z	17	GD0603	30	UB1102	26
DJR183Z	16/20/46	GD0800C	30	UB1103	26
DJR186ZK	16	GD0801C	30	V	
DJR187ZK	16	GD0810C	30	VC2512L	43
DJV180ZK	15	GS5000	30		
DJV181ZJ	15	H			
DJV182ZK	15	HG6031VK	31		
DKP180Z	15	HM0870C	29		
DLM382DZ	7/47	HM1203C	29		


Cordless
Tools
18V+18V
(36V)

3



Cordless
OPE Tools
18V+18V
(36V)

6



Cordless
18V Tools

8



Cordless
18V OPE
Tools

20




Corded
Tools

22



OPE
Tools

44



PRODUCTS

▣ CORDLESS TOOLS

18v + 18v → 36v



- Variable Speed
- Brake
- Reversing
- Mechanical 2-Speed
- Mechanical 3-Speed
- Electronic 2-Speed
- Electronic 3-Speed
- Electronic 4-Speed
- Keyless Chuck
- Torque Setting 16
- Torque Setting 18
- Torque Setting 20
- Torque Setting 21
- SDS-PLUS Shank
- SDS-MAX Shank
- Torque Limiter
- Constant Speed
- Soft Start
- Bevel Cutting 45 left
- Bevel Cutting 45 LR
- Bevel Cutting L45 R5
- Orbital Cutting
- Bayonet Shank Jig Saw Blade
- Laser Marker
- Hook & Loop
- Depth Adjustment
- Sequential and Bump-fire
- Auto Firing Stop
- Anti Vibration
- Automatic Oiling
- Chain Brake
- Revolving Hose
- Static Free Hose
- Dust Collection
- Built-in Job Light
- Carrying Case

18Vx2 Lithium-ion

Powered by two 18V Li-ion batteries in series

The compatible batteries are:

with Battery fuel gauge

1.5Ah
BL1815N*



15min
Charge time

3.0Ah
BL1830B



22min
Charge time

5.0Ah
BL1850B



45min
Charge time

6.0Ah
BL1860B



55min
Charge time

*without Battery fuel gauge

***SEE THE RANGE OF 18V + 18V MACHINES IN THE CATALOGUE MARKED WITH**

When different capacity batteries are used together (for example, 1.5Ah BL1815N and 3.0Ah BL1830B, or fully charged BL1830B and 70% charged BL1830B), the machine stops when a battery is completely discharged.



Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.



DGA900ZK

Cordless Angle Grinder



18V X2 (36V) LXT BL Cordless 230 mm (9") Angle Grinder

- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- ADT (Automatic torque Drive Technology) adjusts speed and torque during operation for optimum performance
- AFT (Active Feedback sensing Technology) turns the motor off if rotation speed suddenly slows or wheel is forced to stop



Wheel Diameter	230 mm (9")
Hole Diameter	22.23 mm (7/8")
No Load Speed (RPM)	6,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 7.5 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	499 x 250 x 158 mm
Net weight	5.2 - 8 kg

DHS710Z

Cordless Circular Saw



- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- Heavy gauge aluminium die cast wraparound base engineered for durability and straighter cuts
- Lightweight for operator comfort



Blade Diameter	185 / 190 mm (7-1/2" / 7-1/4")
Max Cutting Capacity	0": 68.5 / 66 mm (2-11/16" / 2-5/8") 45": 49 / 47.5 mm (1-15/16" / 1-7/8") 50": 44 / 42.5 mm (1-3/4" / 1-11/16")
No Load Speed (RPM)	4,800
Vibration Level	Cutting Wood: 2.5 m/s ² or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	356 x 217 x 298 mm
Net weight	3.9 - 4.6 kg

DSP600ZJ

Cordless Plunge Cut Saw



- Up to 80% faster cutting than corded model SP6000
- Automatic torque Drive Technology (ADT) adjusts cutting speed and torque during cut for optimum performance
- 18V solution for corded power demands



Blade Diameter	165 mm (6-1/2")
Bevel Capacity	-1° - 48°
Max Cutting Capacity	0": 56 mm (2-3/16") 45": 40 mm (1-9/16") 48": 38 mm (1-1/2")
No Load Speed (RPM)	2,500 - 6,300
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Cutting Wood: 2.5 m/s ² or less Cutting Metal: 2.5 m/s ² or less
Dimensions (L x W x H)	346x241x272 mm
Net weight	4.4kg

*Standard with Blade Part no. B-57364

DHR263ZK

Cordless Rotary Hammer



- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Delivers 0-1,250 RPM, 0-5,000 BPM (Makita value) of impact energy for faster drilling
- Vibration absorbing handle provides a sure and comfortable operation
- Ergonomic soft grip handle and large 2-finger trigger provide increased comfort on the job




Impact Energy	EPTA-Procedure 05/2009: 2.5 J
Capacity	Concrete / Steel / Wood: 26 / 13 / 32 mm (1" / 1/2" / 1-1/4")
Chuck Capacity	1.5 - 13mm
Blows Per Minute (BPM)	0 - 5,000
No Load Speed (RPM)	0 - 1,250
Vibration Level	14.5 m/s ² into concrete
Drilling Into Metal:	3.0 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	350x116x232 mm
Net weight	4.1 - 5.1 kg

DHR400ZK

Cordless Rotary Hammer



- 8.0 Joules (EPTA) Impact Energy Delivers High Performance Equivalent to HR4013C
- Newly-developed BL motor delivers high power and excellent performance equivalent to corded model HR4013C
- Low vibration achieved by Anti-Vibration Technology (AVT) & SOFT NO LOAD (suppression of motor speed during no-load)



Impact Energy	EPTA-Procedure 05/200 : 8.0 J
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
Blows Per Minute (BPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete: 5.0 m/s ²
Dimensions (L x W x H)	473x120x285 mm
Net weight	7.3 - 8.1 kg



*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DUB361Z

Cordless Blower



18V X2 (36V) LXT Li-Ion Cordless 2-Speed Blower

- Delivers up to 100 minutes of run time using two 6.0Ah 18V LXT batteries on low speed setting
- Motor produces a maximum air velocity of 93 m/s
- 2-Speed (10,000 & 17,000 RPM) design for optimum speed control
- Compact and lightweight for single handed operation
- Push button air volume selection (High / Low settings)



Max Air Volume	High: 4.4 m³/min (155 CFM) Low: 2.6 m³/min (92 CFM)
Max Air Velocity	High: 93 m/s (208 MPH) Low: 57 m/s (128 MPH)
No Load Speed (RPM)	High: 17,000 Low: 10,000
Sound Pressure Level	82.3 dB(A)
Sound Power Level	94.7 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	905 x 141 x 194 mm
Net weight	3.1 - 3.2 kg

DUB362Z

Cordless Blower



18V X2 (36V) LXT BL Brushless Cordless Variable 6-Speed Blower

- Our most powerful cordless blower yet: Amazing 54 m/s and 13.4 m³/min operation
- Delivers up to 28 minutes of run time at 15,800 RPM using two 18V LXT 5.0Ah batteries
- 6-Stage air velocity/volume selection dial with variable speed control trigger
- 3-Stage telescopic long nozzle with adjustment range of 100 mm for user convenience
- Compact and lightweight for single handed operation



Max Air Volume	13.4 m³/min (473 CFM)
Max Air Velocity	54 m/s (120 MPH)
Blowing Force	14.4 N
Load Speed (RPM)	11,400 - 21,500
Sound Pressure Level	79.1 dB(A)
Sound Power Level	93.5 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	830 x 880 x 930 mm
Net weight	3.5 - 4.2 kg

DUC302Z

Cordless Chain Saw



18V X2 (36V) LXT Li-Ion 300mm Cordless Chain Saw

- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions
- "Tool-less" chain adjustment for convenient operation and maintenance
- Kickback brake & electric brake for maximum operator safety



Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	8.3 m/s (500 m/min) (1,650 FPM)
Chain Oil Tank Volume	85 mL (2.9 US oz)
Sound Pressure Level	84.4 dB(A)
Sound Power Level	95.4 dB(A)
Vibration Level	Cutting Wood: 6.3 m/s²
Dimensions (L x W x H)	600 x 234 x 198 mm
Net weight	4.7 kg

DUC400Z

Cordless Chain Saw



18V X2 (36V) LXT BL 400mm Brushless Cordless Chain Saw

- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions



Guide Bar Length	400 mm (16")
Chain Pitch	370 mm (14-1/2")
Chain Gauge	3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL
Sound Pressure Level	87.7 dB(A)
Sound Power Level	100.4 dB(A)
Vibration Level	Cutting Wood: 5.3 m/s²
Dimensions (L x W x H)	443 x 215 x 235 mm w/o guide bar
Net weight	4.6 - 5.5 kg


DUA301Z

Cordless Telescopic Pole Saw



18V X2 (36V) LXT BL AFT 300mm Cordless Telescopic Pole Saw

- High power BL motor delivered the same or higher operation efficiency than 30 cc class engine models
- Torque boost mode raises the current limit temporarily for easy cutting of trunks or thick limbs
- Lightweight pole saw head for easy access to the desire cutting position and reduced operator fatigue
- Ideal for pruning and limbing in tall trees or hard-to-reach areas



Guide Bar Length	300 mm (12")
Recommended Guide Bar Length	250 - 300 mm (10- 12")
Max Cutting Length	300 mm (12")
Saw Chain	Gauge: 1.1/1/3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 = 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160mL
Dimensions (L x W x H)	w/ Guide Bar & Saw Chain 2,826- 4,002 x 155 x 191 mm
Net weight	6.1 - 6.9 kg


DUH651Z

Cordless Hedge Trimmer



18V X2 (36V) LXT Li-Ion Cordless Hedge Trimmer

- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- Motor delivers 3,600 SPM for faster cutting
- 6 speed dial (2,000 - 3,600 SPM) allows the user to match the speed to the application



Blade Length	650 mm (25-1/2")
Strokes Per Minute (SPM)	2,000 - 3,600
Tooth Spacing	36 mm (1-7/16")
Sound Pressure Level	82 dB(A)
Sound Power Level	91.1 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	1,135 x 225 x 200 mm
Net weight	4.7 - 5.5 kg

DUR368AZ

Cordless Grass Trimmer



18V X2 (36V) LXT BL Brushless Cordless 3-Speed Grass Trimmer, Bike Handle

- Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance
- Active Feedback sensing Technology (AFT) turns the motor off if blade rotation is suddenly forced to stop
- Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Constant speed control minimizes reduction in rotation speed under load



Cutting Width	Metal Blade: 230 mm (9") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low: 6,500 / 5,300 / 3,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	4-Tooth Blade: 74.7 dB(A)
Sound Power Level	4-Tooth Blade: 89.2 dB(A)
Sound Pressure Level	Nylon Cutting Head: 76.4 dB(A)
Sound Power Level	Nylon Cutting Head: 89 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	1,758 x 615 x 442 mm
Net weight	4.1 - 4.75 kg

*Standard with nylon cutting head.

DLM382DZ

Cordless Lawn Mower




18V X2 (36V) LXT Li-Ion Cordless 38 cm (15") Lawn Mower

- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Grass box with grass level indicator
- XPT (eXtreme Protection Technology) dust and drip-proof performance is enhanced for use in bad weather



Cutting Width	380 mm (15")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,700
Actual mowing area on a full battery charge	w/BL1860B x 2 : 569 m ²
Continuous run time on a full battery charge	w/BL1860B x 2 : 35 min.
Dimensions (L x W x H)	1,380-1,410x450x985-1,005 mm
Net weight	16.2 - 16.9 kg



*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

*There is limited stock on some of the models. Please confirm availability.

PRODUCTS

□ CORDLESS TOOLS



- Variable Speed
- Brake
- Reversing
- Mechanical 2-Speed
- Mechanical 3-Speed
- Electronic 2-Speed
- Electronic 3-Speed
- Electronic 4-Speed
- Keyless Chuck
- Torque Setting 16
- Torque Setting 18
- Torque Setting 20
- Torque Setting 21
- SDS-PLUS Shank
- SDS-MAX Shank
- Torque Limiter
- Constant Speed
- Soft Start
- Bevel Cutting 45 left
- Bevel Cutting 45 LR
- Bevel Cutting L45 R5
- Orbital Cutting
- Bayonet Shank Jig Saw Blade
- Laser Marker
- Hook & Loop
- Depth Adjustment
- Sequential and Bump-fire
- Auto Firing Stop
- Anti Vibration
- Automatic Oiling
- Chain Brake
- Revolving Hose
- Static Free Hose
- Dust Collection
- Built-in Job Light
- Carrying Case


Li-Ion Battery & Charger Time Reference, Compatibility Chart

18V Lithium-ion		DC18RC Fast Charger	DC18SE Automotive Charger	DC18RD Two Port Multi Fast Charger
6.0 Ah	 BL1860B (197422-4) *BL1860B with Battery Fuel Gauge*	WITH DC18RC 55 min. Fast Charging	WITH DC18SE 130 min.	
5.0 Ah	 BL1850B (197280-8) *BL1850B with Battery Fuel Gauge*	45 min. Fast Charging	110 min.	
3.0 Ah	 BL1830B (197599-5) *BL1830B with Battery Fuel Gauge*	22 min. Fast Charging	60 min.	
1.5 Ah	 BL1815N (632A54-1)	15 min. Fast Charging	30 min.	No discharging required  Shock Absorbing Heavy Duty Pack  Longtime Storage Low Self Discharge 


710%

Extreme Stamina (5.0Ah) Life time work volume


The figure is a relative value when the amount of Ni-Cd 1.9Ah is indexed at 100.



Digital Communication

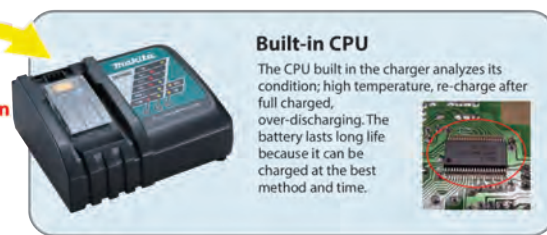

40% Lighter

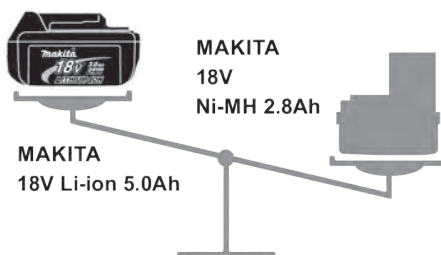

Firm Holding

Multi-contact terminals reduce electrical resistance and increase connection stability withstanding against vibration, and ultimately ensures Stable current supply to the tool.




DGA452ZK

Cordless Angle Grinder



18V LXT Li-Ion Cordless Angle Grinder 115mm, Anti-Restart Function, Slide Switch Lock-On

- Compact barrel grip for easy handling
- Electronic current limiter with warning lamp protects from overloading / over-heating
- Anti-restart function with warning lamp engineered to minimize motor start up when battery is inserted with switch locked on



Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 10.0 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	76 dB(A)
Dimensions (L x W x H)	317 x 129 x 126 mm
Net weight	2.06 - 2.71 kg

DGA456ZJ

Cordless Angle Grinder



18V LXT BL Brushless Cordless Angle Grinder 115mm, Anti-Restart Function, Slide Switch Lock-On

- Performance and efficiency for heavy-duty grinding applications
- ADT (Automatic Torque Drive Technology) adjusts speed and torque during operation for optimum performance
- AFT (Active Feedback Sensing Technology) turns the motor off if rotation speed suddenly slows or wheel is forced to stop



Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	8,500
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 6.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	79 dB(A)
Dimensions (L x W x H)	362 x 130 x 151 mm
Net weight	2.34 - 3.03 kg

DGA458ZJ

Cordless Angle Grinder



18V LXT BL Brushless Cordless Angle Grinder 115mm, Anti-Restart Function, Paddle Switch No-Lock

- Performance and efficiency for heavy-duty grinding applications
- ADT (Automatic Torque Drive Technology) adjusts speed and torque during operation for optimum performance
- AFT (Active Feedback Sensing Technology) turns the motor off if rotation speed suddenly slows or wheel is forced to stop



Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	8,500
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 5.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	80 dB(A)
Dimensions (L x W x H)	362 x 130 x 151 mm
Net weight	2.34 - 3.03 kg (5.17 - 6.67 lbs.)

DSS610ZJ

Cordless Circular Saw



18V LXT Li-Ion Cordless 165mm (6-1/2") Circular Saw

- Lightweight and compact design
- Smooth cutting at high rotational speed of 3,700 RPM
- Built-in dust blower directs sawdust away from cutting line
- Built-in L.E.D. job light for more illuminated accurate work



Blade Diameter	165 mm (6-1/2")
Hole Diameter	15.88 / 20mm (5/8 / 13/16")
Max Cutting Capacity	0°: 0-57 mm (2-1/4") 45°: 0-40 mm (1-9/16") 50°: 0-36 mm (1-7/16")
No Load Speed (RPM)	3,700
Dimensions (L x W x H)	347 x 202 x 228 mm
Net weight	3.0 - 3.4 kg

*Standard with Blade Part no. A-85101

DHS680ZJ

Cordless Circular Saw



18V LXT BL ADT Cordless 165mm (6-1/2") Circular Saw

- High-efficiency BL motor provides higher power
- Smooth cutting at high rotational speed of 5,000 RPM
- Compact and lightweight design
- ADT (Automatic Torque Drive Technology) adjusts speed and torque during operation for optimum performance
- Blower function blows sawdust off the cut line ahead for a better cutting view



Blade Diameter	165 mm (6-1/2")
Hole Diameter	15.88 / 20 / 25.4 / 30mm
Max Cutting Capacity	90°: 57 mm (2-1/4") 45°: 41 mm (1-5/8") 50°: 37 mm (1-7/16")
No Load Speed (RPM)	5,000
Vibration Level	Cutting Wood: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	350 x 170 x 238 mm
Net weight	3 - 3.3 kg

*Standard with Blade Part no. A-85101


DPB180ZK

Cordless Portable Band Saw



18V LXT Li-Ion Cordless Portable Band Saw

- 6-Setting variable speed control dial enables user to match the speed to the application
- Built-in L.E.D. protection circuit with over-torque control protects motor
- Tool hook secures the tool when not in use



Capacity	Round: 120 mm (4-3/4") Rectangular: 120 x 120 mm (4-3/4"x4-3/4")
Blade Speed	1.4 - 275 m/min
Blade Size	Length: 1.140mm (44-7/8") Width: 13mm (1/2") Thickness: 0.5mm (0.02")
Dimensions (L x W x H)	523 x 231 x 313 mm
Net weight	6.8 - 7.1 kg

DCG180ZK

Cordless Caulking Gun



18V LXT Li-Ion Cordless Caulking Gun

- Delivers 5,000 N (1,100 lbs) of dispensing force to work with the highest viscosity adhesives and sealants
- 5 Speed dial optimizes flow rate from 0 - 28 mm/sec. (0 - 66 IPM)
- Variable speed trigger allows user to match the speed to the application



Max Dispensing Force	5,000 N (1,100 lbs)
No load speed	0 - 28 mm/sec. (0 - 66 in/min.)
Holder Size	300 / 600 / 800 mL
Sound Pressure Level	70 dB(A) or less
Vibration Level	Operation w/o Load: 2.5 m/s ² or less
Dimensions (L x W x H)	404 x 108 x 281 mm
Net weight	2.1 - 3.0 kg


DGD800Z

Cordless Die Grinder



18V LXT Li-Ion Cordless 8mm (1/4") Die Grinder

- Compact barrel grip design and lightweight for easy handling
- Slide switch with lock-on for operator convenience
- Vent slots designed to direct exhaust air away from the user
- L.E.D. Light flashes red when it is time to recharge the battery
- Built-in L.E.D. protection circuit with over-torque control protects the motor



Capacity	Collet : 3 mm - 8 mm
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	26,000
Mandrel (shank) length	46 mm
Dimensions (L x W x H)	402 x 82 x 118 mm
Net weight	1.7 - 2.2 kg


DDA350ZK

Cordless Angle Drill



18V LXT Li-Ion Cordless 10mm (3/8") Angle Drill, Geared Chuck

- Compact angle head with a small head height of 8mm
- Powerful, lightweight and compact
- LED job light with afterglow function
- Ergonomically designed rubberised soft grip
- Easy-to-operate large paddle switch trigger



Capacity	Steel: 10 mm (3/8")
	Wood: 25 mm (1")
	Hole Saw: 50 mm (2")
Chuck Capacity	1.5 - 10mm (1/16 - 3/8")
No Load Speed (RPM)	0-1,800
Dimensions (L x W x H)	314 x 79 x 115 mm
Net weight	1.5 - 1.8 kg

DUB185Z

Cordless Blower



18V LXT Li-Ion Cordless Variable 3-Speed Blower

- Variable speed (0-18,000 RPM) for optimum speed control
- Compact and ergonomic design at only 525 mm long
- Rubberised soft grip handle for increased operator comfort



No Load Speed (RPM)	0-18,000
Blowing Force	3.1 N
Max Sealed suction	5.8 kPa
Continuous Use	w/ BL1850B High / Med / Low 21 / 50 / 130 min
	w/ BL1830B High / Med / Low 13 / 30 / 80 min
Dimensions (L x W x H)	517 x 156 x 210 mm
Net weight	1.6 - 2.1 kg

DHP453ZK

Cordless Impact Driver Drill



18V LXT Li-Ion Cordless 13mm (1/2") Impact Driver Drill

- Variable 2-speed design (0 - 400 & 0 - 1,300 RPM) covers a wide range of drilling, driving and hammer applications
- 16 Adjustable torque settings in screwdriver mode
- Electric brake for operator safety



Capacity	Steel: 13 mm (1/2"), Wood: 36 mm (1-7/16") Masonry: 13 mm (1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0-19,500 / Low: 0-6,000
No Load Speed (RPM)	High: 0-1,300 Low: 0-400
Max Fastening Torque	Hard / Soft: 42 / 27 N-m
Max lock torque	38 N-m (420 in.lbs.)
Dimensions (L x W x H)	240 x 79 x 244 mm
Net weight	1.7 - 2 kg


DHP453RYE

Cordless Impact Driver Drill Kit



18V LXT Li-Ion Cordless 13mm (1/2") Impact Driver Drill Kit

Includes :2 x BL1815N batteries and 1 x DC18RC charger.



Capacity	Steel: 13 mm (1/2"), Wood: 36 mm (1-7/16") Masonry: 13 mm (1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0-19,500 / Low: 0-6,000
No Load Speed (RPM)	High: 0-1,300 Low: 0-400
Max Fastening Torque	Hard / Soft: 42 / 27 N-m
Max torque	48 N-m (420 in.lbs.)
Dimensions (L x W x H)	240 x 79 x 244 mm
Net weight	1.7 - 2 kg

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

*There is limited stock on some of the models. Please confirm availability.

DHP482ZJ

Cordless Impact Driver Drill



18V LXT Li-Ion Cordless 13mm (1/2") 64 N-m Impact Driver Drill

- Compact and lightweight design with overall length of 198 mm
- 1,900 RPM (High) and 600 RPM (Low)
- Variable 2-speed transmission (0-600 & 0-1,900 RPM) for a wide range of drilling and fastening applications



XPT 18V



Capacity	Wood (Self-feeding bit) / Steel / Wood / Masonry: 60 / 13 / 38 / 13 mm (2-3/8" / 1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 28,500 / 0 - 9,000
No Load Speed (RPM)	High / Low: 0 - 1,900 / 0 - 600
Max Fastening Torque	Hard / Soft: 62 / 36 N-m (550 / 320 in.lbs.)
Max Torque	64 N-m (570 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 6.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Dimensions (L x W x H)	198 x 79 x 249 mm
Net weight	1.5 - 1.8 kg

DHP482RFE

Cordless Impact Driver Drill Kit



18V LXT Li-Ion Cordless 13mm (1/2") Impact Driver Drill Kit

Includes: 2 x BL1830B batteries and 1 x DC18RC charger.



XPT 18V



Capacity	Wood (Self-feeding bit) / Steel / Wood / Masonry: 60 / 13 / 38 / 13 mm (2-3/8" / 1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 28,500 / 0 - 9,000
No Load Speed (RPM)	High / Low: 0 - 1,900 / 0 - 600
Max Fastening Torque	Hard / Soft: 62 / 36 N-m (550 / 320 in.lbs.)
Max Torque	64 N-m (570 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 6.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Dimensions (L x W x H)	198 x 79 x 249 mm
Net weight	1.5 - 1.8 kg

DHP484ZJ

Cordless Impact Driver Drill



18V LXT BL Brushless Cordless 13mm (1/2") 65 N-m Driver Drill

- Compact and ergonomic design at only 182 mm long
- Variable 2-speed (0-500 & 0-2,000 RPM) for a wide range of drilling, fastening and hammer drilling applications
- 0-30,000 IPM for fast hammer drilling in masonry materials



BL MOTOR XPT 18V



Capacity	Wood (self-feed bit) / Steel / Wood / Masonry: 76 / 13 / 38 / 13 mm (3" / 1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 30,000 / 0 - 7,500
No Load Speed (RPM)	High / Low: 0 - 2,000 / 0 - 500
Max Fastening Torque	Hard / Soft: 54 / 30 N-m (480 / 270 in.lbs.)
Max Torque	65 N-m (580 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 8.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	182 x 79 x 261 mm
Net weight	1.6 - 1.9 kg

DHP485ZJ

Cordless Impact Driver Drill



18V LXT BL Brushless Cordless 13mm (1/2") 60 N-m Impact Driver Drill

- Compact design at only 182 mm long
- Dual LED lights with pre-glow and afterglow functions illuminate the work area
- Ergonomically designed grip for comfortable handling
- Variable 2-speed (0-500 & 0-1,900 RPM) for a wide range of drilling, fastening and hammer drilling applications



BL MOTOR XPT 18V



Capacity	Wood (self-feed bit) / Steel / Wood / Masonry: 76 / 13 / 38 / 13 mm (3" / 1/2" / 1-1/2" / 1/2")
Chuck capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 28,500 / 0 - 7,500
No Load Speed (RPM)	High / Low: 0 - 1,900 / 0 - 500
Max Fastening Torque	Hard / Soft: 50 / 27 N-m (440 / 240 in.lbs.)
Max Torque	60 N-m (530 in.lbs.)
Vibration Level	Hammer Drilling into Concrete: 8.0 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	182 x 79 x 255 mm
Net weight	1.5 - 1.8 kg

DHP458ZK

Cordless Impact Driver Drill



18V LXT Li-Ion Cordless 13mm (1/2") 110 N-m Impact Driver Drill

- Mechanical 2-speed transmission covers a wide range of drilling, fastening and hammer drilling applications
- Compact design at only 225 mm long and lightweight
- Extreme Protection Technology (XPT) is engineered for improved dust and water resistance for operation in harsh conditions



XPT 18V



Capacity	Steel: 13 mm (1/2") Wood: 76 mm (3") Wood (self-feed bit): 92mm (3-5/8") Masonry: 16 mm (5/8")
No Load Speed (RPM)	High: 0-2,000 Low: 0-400
Impacts Per Minute (IPM)	High: 0-30,000 Low: 0-6,000
Max Fastening Torque	Hard / Soft: 91 / 58 N-m
Max Torque	110 N-m (970 in.lbs.)
Dimensions (L x W x H)	225 x 79 x 259 mm
Net weight	2.2 - 2.6 kg

DHP486ZJ

Cordless Impact Driver Drill



18V LXT BL Brushless Cordless 13mm (1/2") 141 N-m Impact Driver Drill

- An efficient brushless tool with two speed ranges for screw driving and drilling for professional use
- A versatile tool for fitters, builders and maintenance operators
- Integrated LED light.



BL MOTOR LXT XPT 18V



Capacity	Steel: 20 mm, Wood (Self-feed-Bit): 76 mm Masonry: 20 mm
Chuck Capacity	1.5 - 13mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 31,500 / 0 - 8,250
No Load Speed (RPM)	High / Low: 0 - 2,100 / 0 - 550
Max Fastening Torque	Hard / Soft: 130 / 65 N-m (1,150 / 580 in.lbs.)
Max Torque	141 N-m (1,250 in.lbs.)
Dimensions (L x W x H)	178 x 81 x 265 mm
Net weight	2.3 - 2.7 kg (5.1 - 6.0 lbs.)


DTD152Z

18V LXT Li-Ion Cordless 165 N-m Impact Driver

Cordless Impact Driver



- Developed for main applications such as tightening of self-drilling screws
- Delivers 2,900 max RPM and 165 N-m (1,460 in.lbs.) of max torque
- Compact and lightweight design
- Dual LED lights with pre-glow and afterglow functions illuminates a wider work area



XPT



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16")
	Standard Bolt: M5 - M16 (3/16" - 5/8")
	High Tensile Bolt: M5 - M12 (3/16" - 1/2")
	Coarse thread (in length):
	22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,900
Impacts Per Minute (IPM)	0 - 3,500
Max Fastening Torque	165 N-m (1,460 in.lbs.)
Vibration Level	10.5 m/s ²
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	137 x 79 x 238 mm
Net weight	1.3 - 1.6 kg

DTD153ZJ

18V LXT BL Brushless Cordless 170 N-m Impact Driver

Cordless Impact Driver



- BL motor delivers 3,400 max RPM and 170 N-m (1,500 in.lbs.) of max torque
- Compact and lightweight design
- Dual LED lights with pre-glow and afterglow functions illuminates a wider work area



BL MOTOR XPT



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16")
	Standard Bolt: M5 - M16 (3/16" - 5/8")
	High Tensile Bolt: M5 - M14 (3/16" - 9/16")
	Coarse thread (in length):
	22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 3,400
Impacts Per Minute (IPM)	0 - 3,600
Max Fastening Torque	170 N-m (1,500 in.lbs.)
Vibration Level	13.0 m/s ²
Sound Pressure Level	96 dB(A)
Sound Power Level	107 dB(A)
Dimensions (L x W x H)	126 x 79 x 238 mm
Net weight	1.3 - 1.6 kg

DTD154Z

18V LXT BL Brushless Cordless T-Mode 3-Speed 175 N-m Impact Driver

Cordless Impact Driver



- ULTRA-COMPACT and ergonomic design at only 117 mm long
- Dual LED lights with pre-glow and afterglow functions illuminates a wider work area
- T-mode has an automatic electronic controller that downshifts and reduces rotation and impact speed prior to driving screw into place, and is engineered to minimize screw thread stripping, screw breakage and damage to work



BL MOTOR XPT



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16")
	Standard Bolt: M5 - M16 (3/16" - 5/8")
	High Tensile Bolt: M5 - M14 (3/16" - 9/16")
	Coarse thread (in length):
	22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Hard / Medium / Soft: 0 - 3,600 / 0 - 2,100 / 0 - 1,100
Impacts Per Minute (IPM)	Hard / Medium / Soft: 0 - 3,800 / 0 - 2,600 / 0 - 1,100
Max Fastening Torque	175 N-m (1,550 in.lbs.)
Vibration Level	12.5 m/s ²
Sound Pressure Level	96 dB(A)
Sound Power Level	107 dB(A)
Dimensions (L x W x H)	117 x 79 x 236 mm
Net weight	1.3 - 1.6 kg

DTD172ZJ

18V LXT BL Brushless Cordless Wood/Bolt/T-Mode 180 N-m Impact Driver

Cordless Impact Driver



- A compact and light impact driver that is easy to use but offers a max. fastening torque of 180 Nm, suitable for quick driving.
- A handy LED light for added lighting.



BL MOTOR XPT LXT



Capacity	Machine Screw: M4 - M8 (5/32" - 5/16")
	Standard Bolt: M5 - M16 (3/16" - 5/8")
	High Strength Bolt: M5 - M14 (3/16" - 9/16")
	Steel: 22 mm (7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Max / Hard / Mid / Soft / Wood / Bolt / T (1) / T (2) mode: 0 - 3,600 / 3,200 / 2,100 / 1,100 / 1,800 / 3,600 / 2,900 / 3,600
Impacts Per Minute (IPM)	Max / Hard / Mid / Soft / Wood / Bolt / T (2) mode: 0 - 3,800 / 3,600 / 2,600 / 1,100 / 3,800 / 3,800 / 2,600
Max Fastening Torque	180 N-m (1,590 in.lbs.)
Fastening Torque	Hard / Med / Soft: 170 / 50 / 20 N-m (1,510 / 440 / 180 in.lbs.)
Vibration Level	Fastening Bolt: 13.5 m/s ²
Sound Pressure Level	97 dB(A)
Sound Power Level	108 dB(A)
Dimensions (L x W x H)	w/BL1830B / BL1850B / BL1860B: 114 x 81 x 236 mm
Net weight	1.2 - 1.5 kg

DWR180Z

18V LXT Li-Ion Cordless 47.5 N-m Ratchet Wrench

Cordless Ratchet Wrench



- Narrow head design for access to tight spaces
- High performance with up to 47.5Nm max fastening torque
- Paddle switch design with variable speed control



LXT XPT



Capacity	Standard Bolt: M5 - M12 (3/16" - 1/2")
	High Strength Bolt:
	M5 - M10 (3/16" - 3/8")
Square Drive	9.5 / 6.35 mm (3/8" / 1/4")
No Load Speed (RPM)	0 - 800
Max Fastening Torque	47.5 N-m (420 in.lbs.)
Flats Width	13 mm (1/2")
Angle Head Size	Diameter: 31 mm Height 25.5 mm
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 369 x 79 x 87 mm
Net weight	1.2 - 1.6 kg (2.6 - 3.5 lbs.)

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DTW190ZK

Cordless Impact Wrench



18V LXT Li-Ion Cordless 12.7mm (1/2") 190 N-m Impact Wrench

- 190 N-m (140 ft.lbs.) of Max torque
- Strap improves freedom of operator's movement during work
- 0 - 2,300 RPM & 0 - 3,000 IPM for a wide range of fastening applications
- Compact, lightweight and ergonomic design at only 176 mm long

* Tool does not come with socket



Fastening Capacities	Standard Bolt: M8 - M16 (5/16" - 5/8") High Tensile Bolt: M8 - M12 (5/16" - 1/2")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,300
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	190 N-m (140 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 8.5 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Overall Length	176 mm
Net weight	1.4 - 1.8 kg

DTW251ZK


Cordless Impact Wrench



18V LXT Li-Ion Cordless 12.7 mm (1/2") 230 N-m Impact Wrench

- High torque to weight ratio at 230 N-m (170 ft.lbs.)
- Compact body provides more control and manoeuvrability
- High power, compact and lightweight 4-pole motor
- Electric brake for operator safety

* Tool does not come with socket



Fastening Capacities	Standard Bolt: M10 - M16 (3/8" - 5/8") High Tensile Bolt: M10 - M12 (3/8" - 9/16")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,100
Impacts Per Minute (IPM)	0 - 3,200
Max Fastening Torque	230 N-m (170 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 11.0 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	165 x 79 x 234 mm
Net weight	1.5 - 1.8 kg

DTW300ZJ

Cordless Impact Wrench



18V LXT BL Cordless 12.7mm (1/2") 330 N-m Impact Wrench

- Reverse Rotation Auto Stop Mode Stops after the bolt/nut is loosened enough
- BL motor delivers 330 N-m of max torque
- Socket can be fixed with ring spring



Fastening Capacities	Standard Bolt: M10 - M20 (3/8" - 3/4") High Strength Bolt: M10 - M16 (3/8" - 5/8")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 3,200 / 0 - 2,600 / 0 - 1,800 / 0 - 1,000
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 4,000 / 0 - 3,400 / 0 - 2,600 / 0 - 1,800
Max Fastening Torque	330 N-m (240 ft.lbs.)
Nut-busting Torque	580 N-m (430 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 144 x 81 x 246 mm
Net weight	1.5 - 1.8 kg


DTW700ZJ

Cordless Impact Wrench



18V LXT Li-Ion BL Brushless Cordless 12.7mm (1/2") 700 N-m (520 ft.lbs.) Impact Wrench

- Delivers 700 N-m of torque
- Forward/Reverse Rotation Auto Stop Mode
- Compact and lightweight design provides superior balance and control
- Socket can be fixed with ring spring



Fastening Capacities	Standard Bolt: M10 - M24 (3/8" - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8" - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 2,200 / 1,900 / 1,200 / 500
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 2,700 / 2,400 / 1,700 / 1,000
Max Fastening Torque	700 N-m (520 ft.lbs.)
Nut-busting Torque	1000 N-m (740 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 170 x 81 x 276 mm
Net weight	2.3 - 2.7 kg

DTW1001ZJ

Cordless Impact Wrench



18V LXT BL Brushless Cordless 3-Speed 19mm (3/4") 1,250 N-m Impact Wrench

- Makita's Most Powerful 18V LXT Impact Wrench
- Compact and lightweight design
- Overall length is 229 mm
- Electronic 3 stage impact power selection reduces fault tightening

* Tool does not come with socket



Fastening Capacities	Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1")
Square Drive	19 mm (3/4")
No Load Speed (RPM)	Hard / Med / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900
Impacts Per Minute (IPM)	Hard / Med / Soft: 0 - 2,200 / 0 - 2,000 / 0 - 1,800
Max Fastening Torque	1,250 N-m (920 ft.lbs.)
Nut-busting Torque	1,700 N-m (1,250 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 15.5 m/s ²
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Dimensions (L x W x H)	229 x 91 x 289 mm
Net weight	3.4 - 3.7 kg

DTW1002ZJ

Cordless Impact Wrench



18V LXT BL Brushless Cordless 3-Speed 12.7mm (1/2") 1,200 N-m Impact Wrench

- Electronic 3 stage impact power selection reduces fault tightening
- Compact and lightweight design



Fastening Capacities	Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Hard / Med / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900
Impacts Per Minute (IPM)	Hard / Med / Soft: 0 - 2,200 / 0 - 2,000 / 0 - 1,800
Max Fastening Torque	1,200 N-m (890 ft.lbs.)
Nut-busting Torque	1,600 N-m (1,180 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 18.0 m/s ²
Sound Pressure Level	97 dB(A)
Sound Power Level	108 dB(A)
Dimensions (L x W x H)	229 x 91 x 289 mm
Net weight	3.3 - 3.6 kg

DJV180ZK

Cordless Jig Saw



18V LXT Li-Ion Cordless Top Handle Jig Saw

- Low vibration and noise
- Toolless push-in lock system enables quick blade changes
- 3 orbital settings plus straight cutting with a powerful motor for use in a variety of materials
- Variable speed control dial (0 - 2,600 SPM) enables user to match the speed to the application for optimal cutting performance in a variety of materials



Capacity	Wood: 135 mm (5-5/16")
	Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	0 - 2,600
Bevel Range	0 - 45°
Dimensions (L x W x H)	257x73x208 mm
Net weight	2.7 - 3.0 kg

DJV181ZJ

Cordless Jig Saw



18V LXT BL Brushless Cordless Barrel Handle Jig Saw

- Barrel handle cordless jig saw
- Powerful Brushless DC motor
- Lightweight body
- Electric brake for maximum operator safety



Capacity	Wood: 135 mm (5-5/16")
	Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 3,500
Bevel Range	0 - 45°
Dimensions (L x W x H)	298 x 77 x 189 mm
Net weight	2.3 - 2.6 kg

DJV182ZK

Cordless Jig Saw



18V LXT BL Brushless Cordless Top Handle Jig Saw

- Top handle cordless jig saw
- Powerful Brushless DC motor
- Lightweight body
- Trigger switch with lock-on button



Capacity	Wood: 135 mm (5-5/16")
	Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 3,500
Bevel Range	0 - 45°
Dimensions (L x W x H)	266 x 77 x 208 mm
Net weight	2.4 - 2.7 kg

DPJ180ZJ

Cordless Biscuit Joiner



18V LXT Li-Ion Cordless Biscuit Joiner

- Provides up to 300 cuts or 150 joints on a single charged BL1830B
- Rack-and-pinion vertical fence system for accurate fence adjustments
- Six depth settings with one-touch stops for #0, #10, and #20 and most common biscuits sizes



Blade Diameter	100 mm (4")
Hole Diameter	22 mm (7/8")
No Load Speed (RPM)	6,500
Dimensions (L x W x H)	351 x 139 x 149 mm
Net weight	2.8 - 3.1 kg

DTM50ZK

Cordless Multi Tool



18V LXT Li-Ion Cordless Multi Tool

- Fully 360° multi angle setting enables users to position accessories in 12 different angles
- Ergonomically designed rubberised grip



Oscillations Per Minute (OPM)	6,000-20,000
Dimensions (L x W x H)	307 x 80 x 122 mm
Net weight	1.8 - 2.2 kg

DKP180Z

Cordless Planer



18V LXT Li-Ion Cordless 82mm (3-1/4") Planer

- 2-Blade cutter head with double edge carbide blades for a smooth finish
- Click depth adjustment knob with easy-to-read scale with settings from 0 mm (0") to 2 mm (5/64") for precise depth adjustment



Planing Width	82 mm (3-1/4")
Planing Depth	2.0 mm (5/64")
Rebate	9mm
No Load Speed (RPM)	15,000
Dimensions (L x W x H)	333 x 157 x 160 mm
Net weight	3.2 - 3.5 kg

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DTR180ZJ

Cordless Rebar Tying Tool



18V LXT BL Brushless Cordless Rebar Tying Tool

- Operable by only one hand, allowing the other hand to be free to adjust the position of rebar
- Users can tie by only pulling contact arm against rebars if they continuously hold the trigger



Tie Wire	Dia.: 0.8 mm
Applicable Rebars	D10 x D10 - (D13 x 2) x (D13 x 2)
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	78 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 304 x 93 x 318 mm
Net weight	2.3 - 2.6 kg

DJR183Z

Cordless Recipro Saw



- Variable speed (0 - 3,000 SPM) combined with a 13 mm (1/2") stroke length for faster and more efficient cutting
- Dual-position on/off switch allows for either paddle or trigger switch operation
- Toolless blade change system allows for faster blade installation and removal
- Compact design at 392 mm (15-1/2") long; lightweight for convenient operation



Capacity	Pipe : 50 mm (2") Wood: 50 mm (2")
Length of Stroke	13 mm (1/2")
Vibration Level	Cutting Boards: 8.0 m/s ² Cutting Wooden Beams: 7.0 m/s ²
Strokes Per Minute (SPM)	0-3,000
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	392 x 81 x 209 mm
Net weight	1.5 - 1.7 kg

DJR186ZK

Cordless Recipro Saw



- Toolless blade change
- Ergonomically designed handle with elastomer for more comfortable and controlled operation
- Soft grip provides more comfort and control
- Large 2-finger trigger
- Variable speed trigger
- Electric brake for operator safety
- XPT (eXtreme Protection Technology) for use in outdoor applications or harsh environments, protection from dust and dripping water



Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe : 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 13.0 m/s ² Cutting Wooden Beams: 12.5 m/s ²
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	486 x 81 x 223 mm
Net weight	3.5 - 3.8 kg

DJR187ZK

Cordless Recipro Saw



- Brushless DC motor with high power to weight and size ratio
- Compact and lightweight design for easy handling and high manoeuvrability
- Toolless shoe adjustment and blade change
- Electric 2 speed provides ideal RPM of high speed for cutting wood and low speed for cutting metal
- Variable speed trigger
- LED job light with pre-glow and afterglow functions illuminates cutting area



Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	High / Low: 0 - 3,000 / 0 - 2,300
Capacity	Pipe : 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 16.5 m/s ² Cutting Wooden Beams: 15.5 m/s ²
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	439 x 83 x 231 mm
Net weight	3.4 - 3.8 kg

DHR202ZK

Cordless Rotary Hammer



- Motor delivers 0 - 1,100 RPM and 0 - 4,000 BPM for 2X faster drilling
- Synchronized RPM and BPM prevents overlapping impacts for up to 50% more efficient drilling
- 3-Mode operation; "rotation only", "hammering with rotation" and "hammering only"
- 40 different chisel positions for increased comfort and performance



Impact Energy	2 J
Capacity	Concrete: 20 mm (13/16") Steel: 13 mm (1/2") Wood: 26 mm (1")
Blows Per Minute (BPM)	0 - 4,000
No Load Speed (RPM)	0 - 1,100
Chuck Capacity	1.5 - 13mm (1/16 - 1/2")
Dimensions (L x W x H)	358 x 84 x 259 mm
Net weight	3.2 - 4 kg

DHR242ZJ

Cordless combination Hammer



18V LXT BL Brushless Cordless 24mm (15/16") Combination Hammer, SDS-PLUS Bits

- Lightweight, 3-Mode Rotary Hammer
- BL motor delivers 0 - 950 RPM and 0 - 4,700 BPM
- Ergonomically designed vibration absorbing handle and a large 2-finger trigger for operator comfort
- 3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only" for multiple applications
- One touch sliding chuck enables quick and easy bit changes
- Torque limiting clutch



Impact Energy	2 J
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 27 mm (1-1/16")
Blows Per Minute (BPM)	0 - 4,700
No Load Speed (RPM)	0 - 950
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 13.5 m/s ²
Chuck Capacity	1.5 - 13mm (1/16 - 1/2")
Dimensions (L x W x H)	328 x 85 x 213 mm
Net weight	3.1 - 3.8 kg

DBO180Z

Cordless Random Orbit Sander



18V LXT Li-Ion Cordless 125mm (5") 3-Speed Random Orbit Sander

- Three speed settings (7,000 / 9,500 / 11,000 OPM) for faster material removal
- Large 2.8 mm (1/8") random orbit action for fast sanding and swirl-free finish
- One-touch electronic speed control switch provides fast, medium and low settings
- Ergonomically designed body and grip for increased operator comfort



Pad diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	7,000 / 9,500 / 11,000
Dimensions (L x W x H)	175 x 123 x 153 mm
Net weight	1.4 - 1.7 kg

DGP180Z

Cordless Grease Gun



18V LXT Li-Ion Cordless Grease Gun

- Practical grease gun which is ideal for lubrication applications for workshops, agriculture and heavy machinery
- Capacity is 475 ml and the tool provides pressure of 69 Mpa.
- Light weight and compact in size.



Max Operating Pressure	69 MPa (10,000 PSI)
Flow Rate	Slow Speed Mode: 145 mL/min (5.0 oz/min)
	Auto Speed Change Mode: 290 mL/min (10.0 oz/min)
Grease Capacity: Barrel A	Cartridge / Bulk: 410 / 455 g (14.5 / 16.0 oz)
Hose Length	120 cm (47-1/4")
Dimensions (L x W x H)	w/ Barrel A 449 x 114 x 245 mm
Net weight	4.8 - 6.1 kg

DJN161Z

Cordless Nibbler



18V LXT Li-Ion Cordless 1.6mm (16 Ga) Nibbler

- Motor delivers 1,900 SPM for faster and smooth cutting
- Die holder rotates 360° to meet demands of cutting direction
- Convenient chip disposal is below cutting material to minimize damage to cutting surface
- Cutting radius: inner edge 45 mm (1-3/4"); outer 50 mm (2")



Capacity	Steel up to 400 N/mm ² : 1.6 mm
	Steel up to 600 N/mm ² : 1.2 mm
	Aluminium up to 200 N/mm ² : 2.5 mm
Min. Cutting radius	Inside edge: 45 mm (1-3/4")
	Outside edge: 50 mm (2")
Strokes Per Minute (SPM)	1,900
Dimensions (L x W x H)	313 x 78 x 189 mm
Net weight	1.9 - 2.3 kg

DRV250ZJ

Cordless Rivet Gun



18V LXT BL Brushless Cordless Rivet Gun

- Jaw case designed to enable tight space operation
- The short centre height allows for tight space operation such as close-to-wall riveting
- Compatible with various sizes of blind rivets
- A wide range of nose pieces and jaw pushers allow for tightening various sizes of blind rivets
- Compatible rivet diameter: 2.4 - 6.4 mm



Pulling Force	20 kN (4,500 lbs.)
Stroke	30 mm (1-3/16")
Rivet Diameter Range	2.4 - 6.4 mm (3/32" - 1/4")
Centre Height	26mm
Work Amount	w/ BL1860B: 2,800 pcs
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B:
	323 x 80 x 287 mm
Net weight	2.1 - 2.4 kg


DPT353Z

Cordless Pin Nailer



18V LXT Li-Ion Cordless 23 Ga 35mm (1-3/8") Pin Nailer

- Low Reaction Force Mechanism Enables Easier Long Pin Nailing and High-Quality Finish
- Easy-to-see slim nose tip allows quick and easy access to a desired fastening point
- Nails can be fired in the groove of baseboard
- Shoots 6,400 nails on a single full BL1860B charge
- Contact arm mechanism enables "continuous nailing" and "drag nailing"



Capacity	Length:
	15, 18, 25, 30, 35 mm
	(5/8", 11/16", 1", 1-3/16", 1-3/8")
	Dia: 0.6 mm (1/32")
	Gauge: 23 Ga
Magazine Capacity	120
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	76 dB(A)
Dimensions (L x W x H)	257 x 79 x 226 mm
Net weight	2.0 - 2.3 kg

DST221Z

Cordless Stapler



18V LXT Li-Ion Cordless 10mm (3/8") Stapler

- A convenient window on magazine shows the number of remaining staples
- Spring-loaded driving mechanism
- Rugged aluminium magazine ensures smooth loading and feeding of staples



Staple	Width: 10 mm (3/8")
	Length: 10, 13, 16, 19, 22 mm
	(3/8", 1/2", 5/8", 3/4", 7/8")
	Gauge: 0.6 x 1.2 mm (1/32" x 1/16")
Magazine Capacity	98
Vibration Level	3.5 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	251 x 91 x 212 mm
Net weight	2.1 - 2.4 kg

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

*There is limited stock on some of the models. Please confirm availability.

DRT50ZJ

Cordless Trimmer



18V LXT BL Brushless Cordless 6mm (1/4"), 8mm (3/8") Variable Speed Trimmer with Dual LED Lights

- BL motor delivers the power and performance
- Plastic cover plate protects workpiece from scratches
- 30,000 RPM for fast trimming
- Conveniently located variable speed control dial (10,000 - 30,000 RPM) enables user to match the speed to the application while holding the body
- Dual LED job lights illuminate cutting edge and increase visibility



Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
No Load Speed (RPM)	10,000 - 30,000
Plunge Capacity	w/ Trimmer Base: 0 - 40 mm (0" - 1-9/16") w/ Plunge Base: 0 - 35 mm (0" - 1-3/8")
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less Cutting Grooves in MDF: 4.5 m/s ²
Sound Pressure Level	78 dB(A)
Base Inner	30 mm (1-3/16")
Dimensions (L x W x H)	w/BL1830B / BL1840B / BL1850B / BL1860B: 134 x 89 x 226 mm
Net weight	1.8m - 2.1 kg

DRT50ZJX2

Cordless Trimmer Kit



18V LXT BL Brushless Cordless 6mm (1/4"), 8mm (3/8") Variable Speed Trimmer Kit

- 4 Different base assemblies for added versatility
- BL motor delivers the power and performance
- Plastic cover plate protects workpiece from scratches
- 30,000 RPM for fast trimming
- Conveniently located variable speed control dial (10,000 - 30,000 RPM) enables user to match the speed to the application while holding the body
- Dual LED job lights illuminate cutting edge and increase visibility



Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
No Load Speed (RPM)	10,000 - 30,000
Plunge Capacity	w/ Trimmer Base: 0 - 40 mm (0" - 1-9/16") w/ Plunge Base: 0 - 35 mm (0" - 1-3/8")
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less Cutting Grooves in MDF: 4.5 m/s ²
Sound Pressure Level	78 dB(A)
Base Inner	30 mm (1-3/16")
Dimensions (L x W x H)	w/BL1830B / BL1840B / BL1850B / BL1860B: 134 x 89 x 226 mm
Net weight	1.8m - 2.1 kg

CORDLESS ACCESSORIES

ADP05

Cordless Adapter for USB



18V LXT Li-Ion Cordless Adapter for USB

- Charges or supplies power to smart phones, tablets etc.
- 2 USB output ports with caps.



USB Port	2 (A type)
Dimensions	102 x 72 x 43mm
Net Weight	0.11kg

*Battery cable and smart phone not included

DCF102Z

Cordless Fan



18V LXT Li-Ion Cordless 180mm (7-1/8") Automatic Swing Fan

- Automatically Swings 45° L/R- Compact size allows installation even in small spaces
- 3-stage automatic timer with 1, 2, and 4 hour power-on selection
- Up to 21.2 hours of continuous runtime on low speed with a 18V 6.0Ah LXT battery (battery not included)



Continuous Use (min.)	w/ BL1860B Low / Med / High: 1,270 / 705 / 575
Max Air Velocity	High / Med / Low: 180 / 150 / 120 m/min
Air Flow	High / Med / Low: 4.6 / 3.8 / 3.0 m ³ /min
Fan Diameter	180 mm
Dimensions (L x W x H)	185 x 272 x 284 mm
Net weight	1.3 - 2.0 kg

DMP180Z

Cordless Inflator



18V LXT Li-Ion Cordless Inflator

- For inflating tyres of cars and bicycles, sport balls, etc.
- Stops automatically when preset target pressure is reached
- Remembers the pressure setting last time you powered off
- Digital pressure gauge with backlight for increased visibility



Max Air Pressure	830 kPa (121 PSI) [8.3 bar]
Air Discharge Amount	200 kPa: 12 L/min 700 kPa: 8 L/min 830 kPa: 7 L/min
Hose Length	65 cm (25-1/2")
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 266 x 80 x 174 mm
Net weight	1.4 - 1.7 kg

DHW180Z

Cordless Pressure Washer



18V LXT Li-Ion Cordless Pressure Washer

- Sufficient power for light-duty cleaning tasks
- Two power modes (High/Low)
- 5-in-1 Nozzle
- Can connect to water supply or be used in self-priming function from a water container



Mode switching	Yes
Regular Pressure	Self-priming High: 2.0 Mpa Low: 0.8 Mpa Connecting to water supply: High: 2.4 Mpa Low: 0.8 Mpa
Regular Flow Rate	High: 2.5 L/min Low: 1.5 L/min
Max. Flow Rate	w/o Nozzle 5.3L/min
Continuous Use	BL1830B (18.5 min)
Max. Suction Height	2.0 m
Supplied hose length	6 m
Absorption Connector	G3/4
Fitting Screw	
Dimensions (L x W x H)	419 x 99 x 239 mm
Net weight	2.3 - 2.7 kg


DML815

18V LXT Li-Ion LED Flashlight, 160 Lumens

Cordless LED Flashlight



- Rubberised soft grip, ergonomic design
- 4 Position pivoting head with positive stops at 0, 45, 90, 110°
- Replacement xenon bulb stored in the head case
- With over-discharge protection circuit
- Falling impact strength of 1m enough to protect the bulb.


18V

Run Time (hrs)	Up to: 54 with a 6.0 Ah battery
Illuminance	at 1 m from the light sources 3,000 lx
(High / Med / Low)	160 lm
Luminous Flux	272 mm
Overall Length	0.26 - 0.93 kg
Net Weight	


DML802

18V LXT Li-Ion LED Flashlight, 180 Lumens

Cordless LED Flashlight



- Metal hang hook swivels 360° and folds away for extra convenience
- 2-Mode on/off switch delivers either full brightness (240 lumens) with 12 LED or half brightness (120 lumens) with 6 LED
- Up to 20 hours of continuous illumination in 12 LED mode with BL1860B
- Up to 48 hours of continuous illumination in 6 LED mode with BL1860B


18V

Run Time (hrs)	Up to: 27 with a 6.0 Ah battery
Illuminance	at 0.5 m from the light source 4,000 lx
(High / Med / Low)	180 lm
Luminous Flux	272 mm
Overall Length	0.64 - 1.0 kg
Net Weight	

DML801

18V LXT Li-Ion Flashlight, 240 Lumens

Cordless Flashlight



- Fluorescent light / Flashlight
- Rotatable and foldable light head enables you to use this product as a compact stationary flashlight.


18V

Run Time (hrs)	Full / Half: 20 / 48 with a 6.0 Ah battery
Illuminance	at 0.5 m from the light source
(High / Med / Low)	Full / Half: 400 / 200 lx
Luminous Flux	Full / Half: 240 / 120 lm
Overall Length	380 mm
Net Weight	0.61 - 0.98 kg

CORDLESS CLEANERS


DCL180Z

18V LXT Li-ion Cordless Cleaner

Cordless Cleaner



- Strong suction power for fast cleaning
- Up to 20 min. of continuous use from a single fully charged BL1830B battery and up to 40 min. of continuous use with a BL1860B battery
- Lightweight compact and ergonomic design at only 1000 mm long
- Includes floor and sash nozzles for a variety of applications


18V

Capacity	650 mL
Continuous Use (min.)	w/ BL1830B: 20
Max Air Flow	1.4 m³/min
Max Sealed Suction	4.2 kPa (428 mmH₂O)
Dimensions (L x W x H)	999 x 114 x 152 mm
Net weight	1.2 kg

DVC750L

18V LXT BL Brushless Cordless 7.5 L HEPA Portable Vacuum Cleaner

Cordless Portable Vacuum Cleaner



- Compact, portable and easy-to-use
- BL motor allows 1.6 m³/min of Max air flow / 6.7 kPa of Max sealed suction
- HEPA Filter is used to capture very small particles effectively
- Wet and dry
- 7.5L Large dust bag capacity


18V

Capacity	Dust / Water: 7.5 / 4.5 L
Continuous Use (min.)	w/ BL1850B (High): 30
	w/ BL1850B (Normal): 60
Max Air Flow	at Hose end, High: 1.6 m³/min
	at Hose end, Normal: 1.3 m³/min
Max Sealed Suction	High / Normal: 6.7 / 4.2 kPa
Suction Power	High / Low: 50 / 25W
Dimensions (L x W x H)	418 x 251 x 278 mm
Net weight	4.3 - 4.6 kg

*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.


* There is limited stock on some of the models. Please confirm availability.

DUB186Z

Cordless Blower

18V LXT Li-Ion Cordless Variable Speed Blower

- Long blowing nozzle with curved tip for optimal blowing performance
- 3 Air volume setting (high/medium/low)
- Variable speed (0-18,000 RPM) for optimum speed control
- Ergonomically designed handle with rubberised soft grip
- Optimum grip-to-frame angle



No Load Speed (RPM)	0-18,000
Blowing Force	2.5 N
Continuous Use	w/ BL1850B High / Med / Low 20/ 50/ 130 min w/ BL1830B High / Med / Low 12 / 30/ 80 min
Dimensions (L x W x H)	861 x 156 x 210 mm
Net Weight	1.6 - 2.1 kg

*Cannot be used as vacuum cleaner

DUB184Z

Cordless Blower

18V LXT BL Brushless Cordless Variable Speed Blower

- Ideal for clearing fallen leaves on pavement, grass and hedge clippings or other light debris
- Variable speed control by trigger, with cruise control lever for lock-on operation
- BL motor delivers up to 52.1 m/s and 13.0 m³/min
- Compact and lightweight for single handed operation



No Load Speed (RPM)	0 - 18,000
Blowing Force	10.9 N
Max Air Volume	13.0 m³/min (459 CFM)
Max Air Velocity	52.1 m/s (116 MPH)
Continuous Use	w/ BL1860B: 12 min w/ BL1850B: 10min
Dimensions (L x W x H)	825 x 160 x 285 mm
Net Weight	2.5 - 3.0 kg

DJR183Z

Cordless Pruning/Recipro Saw

18V LXT Li-Ion Cordless Pruning/ Recipro Saw

- Variable speed (0 - 3,000 SPM) combined with a 13 mm (1/2") stroke length
- Dual-position on/off switch allows for either paddle or trigger switch operation
- Toolless blade change system allows for faster blade installation and removal
- Compact design at 392 mm long; lightweight for convenient operation
- Built-in LED light illuminates the work area




Capacity	Pipe : 50 mm (2") Wood: 50 mm (2")
Length of Stroke	13 mm (1/2")
Vibration Level	Cutting Boards: 8.0 m/s² Cutting Wooden Beams: 7.0 m/s²
Strokes Per Minute (SPM)	0-3,000
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	392x81x209 mm
Net Weight	1.5 - 1.7 kg

DUR193Z

Cordless Grass Trimmer

18V LXT Li-Ion Cordless Grass Trimmer, Loop Handle

- A compact and handy line trimmer for trimming and finishing of small gardens
- Equipped with an adjustable telescopic shaft.



Cutting Width	Nylon Cutting Head: 260mm (10-1/4")
No Load Speed (RPM)	7,800
Sound Pressure Level	73.2 dB(A)
Sound Power Level	83.1 dB(A)
Vibration Level	Left/Right: 2.5/ 2.5 m/s² or less
Dimensions (L x W x H)	1248 - 1436 x 265 mm
Maximum Run Time(min)	w/BL1830B:45
Net Weight	2.3-2.6 kg

DUR190LZX3

Cordless Grass Trimmer

18V LXT Li-Ion Cordless 3-Speed Grass Trimmer, Loop Handle

- One protector for metal blade / plastic blade / trimmer head
- Toolless shaft lock for plastic blade change
- The guard integrated with receive washer minimizes weed winding
- Soft grip of ergonomic design



Cutting Width	Nylon Cutting Head: 300 mm (11-3/4") Metal Blade: 230 mm (9") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	3,500 - 6,000
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1,836 x 348 x 236 mm
Net Weight	2.9 - 3.2 kg

DUR192L

Cordless Grass Trimmer



18V LXT BL Brushless Cordless 2-Speed Grass Trimmer, Loop Handle

- 2-Speed options (Low: 4,500 RPM, High: 6,000 RPM) allows the operator to match speed to application

Cutting Width	Nylon Cutting Head: 300 mm
No Load Speed (RPM)	High / Low: 0 - 6,000 / 0 - 4,500
Spindle Size	M10 x 1.25 LH
Max Run Time	w/BL1850B : High / Low: 46 / 97 min
Dimensions (L x W x H)	1795 x 186 x 246 mm
Net Weight	2.3 - 2.6 kg


BL MOTOR LXT



*Standard with nylon cutting head

DUH523Z

Cordless Hedge Trimmer



- Delivers 2,700 strokes per minute (SPM)
- 52 cm (20-1/2") blade
- Improved soft grip design for maximum user comfort
- Anti-vibration structure
- Lower noise level at only 77 dB(A)


18V

Blade Length	520 mm (20-1/2")
Strokes Per Minute (SPM)	2,700
Tooth Spacing	26 mm (1")
Sound Pressure Level	77 dB(A)
Sound Power Level	84.3 dB(A)
Vibration Level	2.5 m/s ²
Dimensions (L x W x H)	938 x 195 x 193 mm (3.0 - 3.4 kg)
Net Weight	


DUN461WZ

Cordless Pole Hedge Trimmer





18V LXT Cordless 46cm (18-1/8") Pole Hedge Trimmer

- Angle adjustable hedge trimmer head, 60° Tilt-up to 75° tilt-down from the horizontal position
- Can be folded in the 180° position for easy transport and storage
- Built-in clutch works to stop the blade motion even if the throttle lever is touched during folding operation
- 10 angle settings, the angle of hedge trimmer head can be changed simply by pushing a button


XPT LXT 18V

Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Tooth Spacing	28 mm (11/16")
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 134 mm
Net Weight	3.0 - 3.3 kg



*Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

*There is limited stock on some of the models. Please confirm availability.

PRODUCTS

▣ INDUSTRIAL POWER TOOLS

CORDED TOOLS



-  Double Insulation
-  Variable Speed
-  Brake
-  Electronic 2-Speed
-  Torque Limiter
-  Constant Speed
-  Soft Start
-  Hook & Loop
-  Dust Collecting
-  Built-in Job Light
-  Carrying Case

GA4534

720W, 115mm Angle Grinder with Paddle Switch

Angle Grinder



- Small diameter barrel grip
- Side handle is positioned at a 20° angle for additional comfort and control
- Paddle switch conveniently located



Continuous rating input	720W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 8.0 m/s ²
	Disc Sanding: 2.5 m/s ²
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	265 x 128 x 103 mm
Net weight	1.98 - 2.31 kg
Power supply cord	2.5 m

9557HNG

840W, 115mm Angle Grinder with Slide Switch

Angle Grinder



- Powerful 840 W motor delivers 11,000 RPM
- Lightweight compact design with small diameter barrel



Continuous rating input	840W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 7.5 m/s ²
	Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	271 x 129 x 106 mm
Net weight	1.7 - 2.2 kg
Power supply cord	2.5 m

GA4540

1,100W, 115mm Angle Grinder with Slide Switch

Angle Grinder



- SJS II (Super Joint System II) provides vibration absorption
- Powerful 1,100 W motor delivers 11,000 RPM
- Slide switch with lock-on for continuous use



Continuous rating input	1,100W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding
	w/Anti-Vibration Side Grip 6.0 m/s ²
	Disc Sanding w/anti-vibration
	Side Grip 2.5m ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	303 x 130 x 116 mm
Net weight	2.3 - 2.7kg
Power supply cord	2.5 m

GA4550

1,300W, 115mm Angle Grinder with Paddle Switch

Angle Grinder



- Extremely powerful 1,300W motor delivers 11,000 RPM
- Lightweight compact design with small diameter barrel
- Paddle switch design with no lock-on



Continuous rating input	1,300W
Wheel Diameter	115 mm (4-1/2")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 7.0 m/s ²
	Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	325 x 130 x 117 mm
Net weight	2.4 - 2.8 kg
Power supply cord	2.5 m

9558HP

840W, 125mm Angle Grinder with Paddle Switch

Angle Grinder



- Powerful 840W motor delivers 11,000 RPM
- Lightweight compact design with small diameter barrel
- Paddle switch design with no lock-on



Continuous rating input	840W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding: 9.0 m/s ²
	Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	273 x 139 x 106 mm
Net weight	1.8 - 3.0 kg
Power supply cord	2.5 m



GA5010

1,050W, 125mm Angle Grinder with Non-lockable Trigger Switch

Angle Grinder



- Powerful 1,050W motor delivers 12,000 RPM
- Lightweight compact design with small diameter barrel
- Comfortable back handle with non-lockable trigger switch



Continuous rating input	1,050W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	12,000
Vibration Level	9.5 m/s ²
	Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	356 x 139 x 112 mm
Net weight	2.6 - 3.8 kg
Power supply cord	2.5 m

* Although Angle Grinders are portrayed with a grinding disc, 180mm & 230mm Angle Grinder are sold without grinding discs.


* There is limited stock on some of the models. Please confirm availability.

GA5040

1,100W, 125mm Angle Grinder with Slide Switch

Angle Grinder

- Powerful 1,100W motor delivers 11,000 RPM
- SJS II (Super Joint System II) provides vibration absorption



Continuous rating input	1,100W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 6.0 m/s ²
	Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	303 x 140 x 116 mm
Net weight	2.5 - 3.6 kg
Power supply cord	2.5 m

GA5040C

1,400W, 125mm Angle Grinder with Slide Switch

Angle Grinder

- Powerful 1,400W motor delivers 2,800 - 11,000 RPM
- SJS II (Super Joint System II) provides vibration absorption
- Variable speed control dial
- Anti-restart function minimizes accidental start-up
- Slide switch with lock-on for continuous use



Continuous rating input	1,400W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	2,800-11,000
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 5.5 m/s ²
	Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ²
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	303 x 140 x 116 mm
Net weight	2.5 - 3.6kg
Power supply cord	2.5 m

GA7010C

1,800W, 180mm Angle Grinder with Non-lockable Trigger Switch

Angle Grinder

- Soft start feature gradually increases speed to eliminate start up shock
- Constant speed control maintains constant speed under load
- Electronic current limiter provides longer motor life
- Non-lockable large trigger switch



Continuous rating input	1,800W
Wheel Diameter	180 mm (7")
No Load Speed (RPM)	8,400
Vibration Level	Surface Grinding: 9.5 m/s ²
	Disc Sanding: 2.5 m/s ²
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	453 x 200 x 137 mm
Net weight	4.2 - 4.7 kg
Power supply cord	2.5 m

GA7020

2,200W, 180mm Angle Grinder with Large Non-lockable Trigger Switch

Angle Grinder

- Powerful 2,200W motor delivers 8,500 RPM
- Three position adjustable side handle
- "Tool-less" wheel guard




Continuous rating input	2,200W
Wheel Diameter	180 mm
No Load Speed (RPM)	8,500
Vibration Level	Surface Grinding: 8 m/s ²
	Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	473 x 200 x 140 mm
Net weight	5.56 - 6.06 kg
Power supply cord	2.5 m

GA9010C

1,800W, 230mm Angle Grinder with Large Non-lockable Trigger Switch

Angle Grinder

- Soft start feature gradually increases speed to eliminate start up shock
- Constant speed control maintains constant speed under load
- Electronic current limiter provides longer motor life
- Non-lockable large trigger switch




Continuous rating input	1,800W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,000
Vibration Level	Surface Grinding: 9.5 m/s ²
	Disc Sanding: 2.5 m/s ²
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	453 x 250 x 137 mm
Net weight	4.36 - 6.65 kg
Power supply cord	2.5 m

GA9050

2,000W, 230mm Angle Grinder with Large Non-lockable Trigger Switch

Angle Grinder

- Compact and lightweight with a 2,000 W motor delivering 6,600 PRM
- Non-lockable large trigger switch



Continuous rating input	2,000W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding: 5.5 m/s ²
	Disc Sanding: 2.5 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	432 x 250 x 132 mm
Net weight	4.64 - 6.94 kg
Power supply cord	2.5 m

GA9020

2,200W, 230mm Angle Grinder with Large Non-lockable Trigger Switch

Angle Grinder



- Powerful 2,200 W motor delivers 6,600 RPM
- Constant speed control maintains constant speed under load
- "Tool-less" wheel guard for more convenient adjustments
- Non-lockable large trigger switch



Continuous rating input	2,200W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding: 5.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	473 x 249 x 140 mm
Net weight	5.76 - 8.05 kg
Power supply cord	2.5 m

GA9020K

2,200W, 230mm Angle Grinder with Large Non-lockable Trigger Switch

Angle Grinder



- Powerful 2,200 W motor delivers 6,600 RPM
- Constant speed control maintains constant speed under load
- "Tool-less" wheel guard for more convenient adjustments
- Non-lockable large trigger switch
- Comes with a carry case



Continuous rating input	2,200W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding: 5.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	473 x 249 x 140 mm
Net weight	5.76 - 8.05 kg
Power supply cord	2.5 m

GA9060

2,200W, 230mm Angle Grinder with Large Non-lockable Trigger Switch

Angle Grinder



- Powerful durable 2,200 W developed for heavier duty applications
- Three position adjustable side handle
- Non-lockable large trigger switch



Continuous rating input	2,200W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 6.0 m/s ² Disc Sanding w/ Anti-Vibration Side Grip: 2.5 m/s ² or less
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	450 x 250 x 144 mm
Net weight	5.50 - 7.86 kg
Power supply cord	2.5 m (8.2 ft)

GA9040SK01

2,600W, 230mm Heavy Duty Angle Grinder with Large Non-lockable Trigger Switch

Angle Grinder



- Powerful 2,600 W motor
- Soft Start suppresses start-up reaction
- Rotatable back handle
- Three position vibration absorbing side handle
- "Tool-less" wheel guard for more convenient adjustments
- Non-lockable large trigger switch



Continuous rating input	2,600W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding: 5.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	503 x 250 x 140 mm
Net weight	6.65 - 8.94 kg
Power supply cord	2.5 m (8.2 ft)



BELT SANDERS

9032

500W, 6 - 13 x 533mm Variable Speed Belt Sander

Belt Sander



- Compact design for sanding in close quarters
- For use on both wood and steel materials
- Adjustable sanding arm pivots up to 100° for access to hard-to-reach areas



Continuous rating input	500W
Belt Size	6 - 13 x 533 mm
Belt Speed	300 - 1,700 m/min
Max sanding depth	110 mm (4-5/16")
Overall Length	420 mm
Net weight	1.6 kg
Power supply cord	2.5 m

* Although Angle Grinders are portrayed with a grinding disc, 180mm & 230mm Angle Grinder are sold without grinding discs.
* There is limited stock on some of the models. Please confirm availability.

CORDED TOOLS

BELT SANDERS

9031

550W, 30 x 533mm Variable Speed Belt Sander

Belt Sander



- For use on wood, metal and fibreglass materials
- Narrow belt and exposed front pulley for use in close quarters
- Lock-on button for continuous operation



410



Continuous rating input	550W
Belt Size	30 x 533 mm (1-1/8" x 21")
Belt Speed	200 - 1,000 m/min
Overall Length	380 mm
Net weight	2.1 kg
Power supply cord	2.5 m

9403

1200W, 100 x 610mm Belt Sander

Belt Sander



- Low noise level (84 dB)
- Belt speed 500 m/min
- Dust bag swivels 360°



303




Continuous rating input	1200W
Belt Size	100 x 610mm (4" x 24")
Belt Speed	500 m/min.
Overall Length	353 mm
Net weight	5.9 kg
Power supply cord	5.0 m

BISCUIT JOINER

PJ7000

700W Biscuit Joiner with Carry Case

Biscuit Joiner



- Rack-and-pinion vertical fence system
- Six depth settings with one-touch strops for no. 0, 10, 20 and most common biscuit sizes
- "Tool-less" blade cover and shaft lock for fast and easy blade changes



459



Continuous rating input	700W
Blade Diameter	100 mm (4")
Hole Diameter	22 mm (7/8")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	302 x 139 x 145 mm
Net weight	2.8 kg
Power supply cord	2.5 m

*Standard with Blade Part No. B-20644

BLOWERS

UB1102

600W, Blower without Dust Bag

Blower



- Ergonomic handle with soft grip
- Large trigger with conveniently located lock-on button
- Compact and lightweight design



304



Continuous rating input	600W
Max Air Volume	4.1 m³/min
Max Air Velocity	91 m/s
Air Pressure	5.7 kPa
No Load Speed (RPM)	16,000
Vibration Level	Operation w/o Load: 2.5 m/s²
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	479 x 185 x 178 mm
Net weight	1.9 - 2.2 kg
Power supply cord	2.5 m

UB1103

600W, Variable Speed Blower with Dust Bag

Blower



- Variable speed control dial and trigger (0 - 16,000 RPM)
- Two tools in one, quickly converts to a vacuum cleaner
- Includes large dust bag for vacuum mode



304



Continuous rating input	600W
Max Air Volume	0 - 4.1 m³/min
Max Air Velocity	0 - 91 m/s
Air Pressure	0 - 5.7 kPa
No Load Speed (RPM)	0 - 16,000
Vibration Level	Operation w/o Load: 2.5 m/s²
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	479 x 185 x 178 mm
Net weight	1.9 - 2.2 kg
Power supply cord	2.5 m

BRAD NAILERS

AF506

18 Gauge, 50mm Pneumatic Brad Nailer

Brad Nailer



F-Type

- Air duster for cleaning the job site as well as workpieces
- Quick-release cam-loc
- Easy to use "tool-less" depth adjustment dial



123



Nail Length	15mm - 50mm
Gauge	18Ga
Magazine Capacity	100pcs
Operating Pressure	0.49 - 0.83 MPa (70 - 120 PSI)
Dimensions (L x W x H)	250 x 70 x 256 mm
Net weight	1.3 kg

BRAD NAILERS

AF601

16 Gauge, 64 mm Pneumatic Brad Nailer

Brad Nailer



T-Type

- Push button air duster for continued operation
- Large fastener capacity of 100 nails
- Operable in either way of "bump fire mode (contact actuation mode)" or "single" sequential actuation mode"



Nail Length	25 - 64 mm (1" - 2-1/2")
Gauge	16 Ga
Operating Pressure	0.49 - 0.83 MPa (70 - 120 PSI)
Magazine Capacity	100
Dimensions (L x W x H)	304 x 95 x 297 mm
Net weight	1.7 kg

CIRCULAR SAWS

HS7601K

1,200W, 190mm Circular Saw

Circular Saw



- Single action lever for quick adjustment of cutting depth
- Rear dust port exhausts sawdust away from operator
- Aluminium base provides smooth cutting
- Bevel cuts 0° - 45°



Continuous rating input	1,200W
Blade Diameter	190 mm (7-1/2")
Max Cutting Capacity	0°: 66 mm (2-5/8")
	45°: 46 mm (1-13/16")
No Load Speed (RPM)	5,200
Dimensions (L x W x H)	309 x 232 x 255 mm
Net weight	3.8 kg
Power supply cord	2.5 m

*Standard with Blade Part No. B-02939

N5900B

2,000W, 190mm Circular Saw

Circular Saw



- Powerful 2,000W motor to rip through most material at 4,100 RPM
- Bevel angle is adjustable up to 50°
- Sturdy industrial saw with ergonomically designed cutting depth adjustment lever



Continuous rating input	2,000W
Max Cutting Capacity	0°: 85 mm (3-3/8")
	45°: 60 mm (2-3/8")
	50°: 53 mm (2-1/16")
Blade Diameter	235 mm (9-1/4")
No Load Speed (RPM)	4,100
Overall Length	380 mm
Net weight	6.8 kg
Power supply cord	2.5 m

*Standard with Blade Part No. A-89866

5903RK

2,000W, 235mm Circular Saw

Circular Saw



- Anti-kickback riving knife
- Soft start for smooth start-ups
- Electric brake for operator safety
- Rollers for smooth, scratch-free action over surface of material



Continuous rating input	2,000W
Max Cutting Capacity	0°: 85 mm (3-1/2")
	45°: 64 mm (2-1/2")
Blade Diameter	235 mm (9-1/4")
No Load Speed (RPM)	4,500
Overall Length	400 mm
Net weight	7.2 kg
Power supply cord	2.5 m

*Standard with Blade Part No. A-89866

HS0600

2,000W, 270mm Circular Saw

Circular Saw



- Large cutting capacity (97 mm at 90° with 260 mm blade, 101 mm at 90° with 270mm blade) and bevel capacity (0° - 50°)
- Aluminium base provides a smooth cut
- Handy guide rule for extra-accurate straight cuts



Continuous rating input	2,000W
Blade Diameter	255 - 270 mm
Max Cutting Capacity	0°: 97 / 101 mm
	45°: 68 / 71 mm
	50°: 61 / 63 mm
No Load Speed (RPM)	4,300
Dimensions (L x W x H)	418 x 273 x 324 mm
Net weight	6.9 kg
Power supply cord	2.5 m

*Standard with Blade Part No. B-12859

5143R

2,200W, 335mm Circular Saw

Circular Saw



- The Super Joint System (SJS) delivers optimum power and torque for top performance. SJS means greater durability
- Anti kickback riving knife
- Safety cover with roller for smooth feeding
- Electric brake for maximum operator safety



Continuous rating input	2,200W
Blade Diameter	335 mm (14")
Max Cutting Capacity	0°: 130 mm (5-1/8")
	45°: 90 mm (3-1/2")
No Load Speed (RPM)	2,700
Overall Length	607 mm
Net weight	12.5 kg
Power supply cord	5.0 m

*Standard with Blade Part No. A-80014

* There is limited stock on some of the models. Please confirm availability.

CIRCULAR SAWS

SP6000J

1,300W, 165mm Plunge Cut Circular Saw

Plunge Cut Circular Saw



- Electronic speed control maintains constant speed under load
- Variable speed dial control (2,200 - 6,400 RPM)
- Built-in current protects the motor
- Electronic soft start
- Mechanical brake for operator safety

Supplied with: 1.4m rail and 2 x clamps.



304



Continuous rating input	1,300W
Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	0°: 56 mm (2-3/16")
	45°: 40 mm (1-9/16")
	48°: 38 mm (1-1/2")
No Load Speed (RPM)	2,200 - 6,400
Dimensions (LxWxH)	341 x 225 x 250 mm
Net weight	4.1 kg
Power supply cord	2.5 m

*Standard with Blade Part No. B-07353

4131

1,100W, 185mm Metal Cutter

Metal Cutter



- Faster, cleaner and more efficient metal cutting
- "Tool-less" blade cover removal and chip collection window
- Quick release blade guard lever for plunge cutting



304



Continuous rating input	1,100W
Blade Diameter	185 mm
Max Cutting Capacity	63mm
No Load Speed (RPM)	3,500
Net weight	4.8kg
Power supply cord	2.5m

*Standard with Blade Part No. B-03931

CONCRETE CUTTERS


SG1251J

1,400W, 125mm SJS Wall Chaser with Soft Start

Wall Chaser



- Offers the most efficient cutting for chasing channels in brick and mortar
- The Super Joint System (SJS) delivers optimum power and torque for top performance. SJS means greater durability
- Constant speed control automatically applies additional power to the motor to maintain speed under load
- Soft start suppresses start-up reaction for more control
- Twin bladed
- 9 Stage adjustable cutting width and depth
- Connectable to dust extraction systems



318



Continuous rating input	1,400W
Capacity	Depth : 0-30 mm (0 - 1-3/16")
	Width: 6-30 mm (1/4 - 1-3/16")
Blade Diameter	125 mm (5")
No Load Speed (RPM)	10,000
Dimensions (LxWxH)	350 x 151 x 178 mm
Net weight	4.3 kg
Power supply cord	5.0 m

*Standard with Blade Part No. A-80438

4114S

2,400W, 355 mm SJS Power Cutter with Soft Start

Power Cutter



- Soft start function minimizes startup shock
- The Super Joint System (SJS) delivers optimum power and torque for top performance. SJS means greater durability
- Powerful 2,400W motor delivers 3,500 RPM
- Built-in vacuum attachment port



203



Continuous rating input	2,400W
Capacity	Max cutting : 125 mm (5")
Wheel Diameter	355 mm (14")
Hole Diameter	25.4 mm (1")
No Load Speed (RPM)	3,500
Dimensions (LxWxH)	673 x 240 x 329 mm
Net weight	10.8 kg
Power supply cord	2.5 m

Blade sold separately

CUT-OFF SAWS


LW1401

2,200W, 355mm Portable Steel Cut-Off Saw

Cut-Off Saw



- Large cutting capacity; cuts up to 127 mm round and 115 mm x 130 mm rectangular tubing
- Large spark guard
- Quick release vise
- D-shaped handle also serves as a carry handle



204



Continuous rating input	2,200W
Wheel Diameter	355 mm (14")
Hole Diameter	25.4 mm (1")
No Load Speed (RPM)	3,800
Capacity at 0°	Round: 127 mm (5")
Capacity at 45°	Round: 127 mm (5")
	Rectangular: 115 x 130 mm
Capacity at 90°	Rectangular: 115, 102, 70 x 130, 194, 233 mm
Dimensions (L x W x H)	500 x 295 x 640 mm
Net weight	18.3 kg
Power supply cord	2.5 m

*Standard with Blade Part no. B-19881


LC1230N

1,750W, 305mm Cold Metal Cutting Saw

Cut-Off Saw



- Carbide-tipped blades last up to 50 times longer than abrasive wheels; cuts clean, accurate and virtually burr-free
- Quick release support fence adjusts 0 - 45° for mitre cutting
- Up to 4 times faster cutting than abrasive cut-off saws in certain applications
- Shavings collection tray for easy waste disposal



204



Continuous rating input	1,750W
Blade Diameter	305 mm (12")
Hole Diameter	25.4 mm (1")
Max Cutting Capacity	0°: 115 mm (4-1/2")
	45°: 90 mm (3-1/2")
No Load Speed (RPM)	1,300
Dimensions (L x W x H)	516 x 306 x 603 mm
Net weight	19.3 kg
Power supply cord	2.5 m

*Standard with Blade Part No. A-87242 - for mild steel

DEMOLITION HAMMERS & BREAKERS

HM0870C

1,100W, 7.6 Joules Demolition Hammer, SDS-MAX

Light Clipper



- Constant speed control automatically applies additional power to the motor to maintain speed under load
- Soft start suppresses start-up reaction
- Variable speed control dial
- 12 Bit angle settings
- Supplied in carry case



350 mm



Continuous rating input	1,100W
Blows Per Minute (BPM)	1,100 - 2,650
Sound Pressure Level	87 dB(A)
Sound Power Level	98 dB(A)
Dimensions (L x W x H)	449 x 109 x 230 mm
Net weight	5.1 - 5.3 kg
Power supply cord	5.0 m

HM1203C

1,510W, 19.1 Joules Demolition Hammer, SDS-MAX

Medium Clipper



- Constant speed control automatically applies additional power to the motor to maintain speed under load
- Soft start suppresses start-up reaction
- Variable speed control dial
- One-touch sliding chuck for easy bit changes
- Supplied in carry case



175 mm



Continuous rating input	1,510W
Blows Per Minute (BPM)	950 - 1,900
Sound Pressure Level	81 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	576 x 128 x 265 mm
Net weight	9.7 kg
Power supply cord	5.0 m

HM1307C

1,510W, 25.5 Joules Demolition Hammer, 30mm Hex Shank

Electric Breaker



- Constant speed control automatically applies additional power to the motor to maintain speed under load
- Soft start suppresses start-up reaction
- Variable speed control dial
- Supplied in carry case



175 mm



Continuous rating input	1,510W
Blows Per Minute (BPM)	730 - 1,450
Sound Pressure Level	81 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	715 x 129 x 266 mm
Net weight	15.3 kg
Power supply cord	5.0 m

HM1802

2,000W, 71.4 Joules Demolition Hammer, 28.6mm Hex Shank

Electric Breaker (without AVT)



- Soft Start for suppressing start-up reaction
- Vibration absorbing housing helps to reduce vibration
- LED lamp indicates when to replace carbon brushes
- Supplied in carry case



218 mm



Continuous rating input	2,000W
Blows Per Minute (BPM)	870
Sound Pressure Level	95 dB(A)
Sound Power Level	106 dB(A)
Dimensions (L x W x H)	843 x 210 x 608 mm
Net weight	29.4 kg
Power supply cord	5.0 m

HM1812

2,000W, 72.8 Joules Demolition Hammer, 28.6mm Hex Shank

Electric Breaker (with AVT)



- 2,000W motor delivers 72.8 Joules (EPTA-Procedure 05/2009) of impact energy
- Advanced AVT (Anti Vibration Technology) greatly reduces vibration and directs more impact energy to the work surface
- Soft Start for suppressing start-up reaction
- Supplied in carry case



218 mm



Continuous rating input	2,000W
Blows Per Minute (BPM)	870
Sound Pressure Level	96 dB(A)
Sound Power Level	107 dB(A)
Dimensions (L x W x H)	843 x 210 x 608 mm
Net weight	31.3 kg
Power supply cord	5.0 m



* There is limited stock on some of the models. Please confirm availability.

DIE GRINDERS

GD0603

240W, 6mm Die Grinder

Die Grinder



- Easy handling palm-sized die grinder
- Ideal for light, precision grinding
- Rocker type switch



63 mm



Continuous rating input	240W
Capacity	Collet : 6 mm or 1/4"
Wheel Diameter	23 mm
No Load Speed (RPM)	28,000
Diameter of grip	65 mm
Circumference of grip	203 mm
Dimensions (L x W x H)	289 x 64 x 67 mm
Net weight	0.98 kg
Power supply cord	2.5 m

Standard with 6 mm collet

GD0600

400W, 6mm Die Grinder

Die Grinder



- Large flush-mount paddle switch
- Powerful 400W motor delivers 25,000 RPM
- Small diameter barrel grip



325 mm



Continuous rating input	400W
Capacity	Collet : 3 / 6 mm (1/8", 1/4")
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	25,000
Dimensions (L x W x H)	358 x 82 x 82 mm
Net weight	1.71 - 1.87 kg
Power supply cord	2.5 m

Standard with 6 mm collet

GD0800C

750W, 8mm High Speed Die Grinder with Slide Switch

Die Grinder



- The Super Joint System (SJS) delivers optimum power and torque for top performance. SJS means greater durability
- Variable speed control dial
- Constant speed control
- Soft start suppresses start-up reaction
- Electronic current limiter



318 mm



Continuous rating input	750W
Capacity	Collet : 6mm
Optional Collet	8mm
No Load Speed (RPM)	28,000
Dimensions (L x W x H)	371 x 75 x 75 mm
Net weight	1.88 kg
Power supply cord	2.5m

Standard with 6mm collet

GD0801C

750W, 8mm High Speed Die Grinder with Paddle Switch

Die Grinder



- The Super Joint System (SJS) delivers optimum power and torque for top performance. SJS means greater durability
- Variable speed control dial
- Constant speed control
- Soft start suppresses start-up reaction
- Electronic current limiter



318 mm



Continuous rating input	750W
Capacity	Collet : 8 mm (1/4")
Wheel Diameter	25 mm (1")
No Load Speed (RPM)	29,000
Vibration Level	Surface Grinding: 3.5 m/s ²
Sound Pressure Level	80 dB(A)
Sound Power Level	91 dB(A)
Dimensions (L x W x H)	390 x 75 x 88 mm
Net weight	1.96 - 1.97 kg
Power supply cord	2.5 m

GD0810C

750W, 8 mm Low Speed Die grinder with Slide Switch

Die Grinder



- The Super Joint System (SJS) delivers optimum power and torque for top performance. SJS means greater durability
- Variable speed control dial
- Constant speed control
- Soft start suppresses start-up reaction



318 mm



Continuous rating input	750W
Capacity	Collet : 6 mm
Wheel Diameter	50 mm (2")
No Load Speed (RPM)	7,000
Overall Length	371 mm
Net weight	1.9 kg
Power supply cord	2.5 m

Standard with 6mm collet

GS5000

750W, 125mm Straight Grinder

Straight Grinder



- "Tool-less" guard cap removal for convenient wheel changes
- 750W motor delivers 5,600 RPM
- Ideal for metal fabrication and pipe welders



204 mm



Continuous rating input	750W
Wheel Diameter	125 mm (5")
Hole Diameter	12.7, 20 mm (1/2, 13/16")
No Load Speed (RPM)	5,600
Dimensions (L x W x H)	590 x 189 x 116 mm
Net weight	5.0 - 5.2 kg
Power supply cord	2.5 m

DRILLS

DP2010N

370W, 6.5 mm High and Variable Speed Drill with Keyed Chuck (Non-impact)

Rotary Drill



- High speed (4,200 RPM) ideal for drilling small holes in thin material
- Forward/reverse switch
- Variable speed
- Depth gauge



419



Continuous rating input	370W
Capacity	Steel: 6.5 mm (1/4")
	Wood: 15 mm (9/16")
No Load Speed (RPM)	0 - 4,200
Chuck Capacity	0.5 - 6.5 mm
Dimensions (L x W x H)	209 x 64 x 175 mm
Net weight	1.0 kg
Power supply cord	2.0 m

DP4002

750W, 13mm High Torque Drill with Keyed Check (Non-impact)

Rotary Drill



- Variable speed (0 - 700 RPM)
- Side handle rotates at 360°
- Large trigger switch
- Forward/reverse switch



419



Continuous rating input	750W
Capacity	Steel: 13 mm (1/2")
	Wood: 38 mm (1-1/2")
No Load Speed (RPM)	0 - 700
Overall Length	304 mm
Net weight	2.7 kg
Power supply cord	2.5 m

DA3010F

450W, 10mm Angle drill with Keyed Check (Non-impact)

Angle Drill



- LED job light
- Variable speed (0 - 2,400 RPM)
- Paddle switch with speed dial
- Small diameter barrel grip



419



Continuous rating input	450W
Capacity	Steel: 10 mm (3/8")
	Wood: 25 mm (1")
No Load Speed (RPM)	0 - 2,400
Overall Length	270 mm
Net weight	1.6 kg
Power supply cord	2.5 m

DS4012

750W, 13mm High Torque D-handle Drill with Keyed Check (Non-impact)

Rotary Drill



- Variable speed (0 - 600 RPM)
- Forward and reverse lever
- D-handle rotates 360° with 24 detent stops for multi-position operation
- On-board chuck key storage
- Ideal for mixing paint and plaster, and drilling large holes in various materials



410



Continuous rating input	750W
Capacity	Steel: 13 mm (1/2")
	Wood: 36 mm (1-7/16")
No Load Speed (RPM)	0 - 600
Dimensions (LxWxH)	340 x 83 x 390 mm
Net weight	2.8 kg
Power supply cord	2.5 m

HEAT GUN

HG6031VK

1,800W Heat Gun with Slide Switch

Heat Gun



- 9 Temperature settings (50 - 600°C) for a variety of applications
- 2-Speed blower settings (250 and 500 L/min)
- Delivers up to 500 L/min at 600°C
- Wide variety of accessories for various applications



Continuous rating input	1,800W
Air Temperature (°C) /	Stage 1: 50 - 400
	Stage 2: 100 - 600
Air Flow (L/min)	Stage 1: 250
	Stage 2: 500
Dimensions (L x W x H)	257 x 85 x 206 mm
Net weight	0.67 kg
Power supply cord	2.0 m

TABLE SAWS

MLT100N

1,500W, 260 mm Table Site Saw

Table Saw



- Large cutting capacity (93 mm at 90°) and (64 mm at 45°)
- Left extension table with smooth sliding action
- Right and rear extension table
- Electronic brake for operator safety
- See-through blade guard system



JM23000123



Optional WST03 Stand for MLT100 Table Saw

Continuous rating input	1,500W
Max Cutting Capacity	0°: 93 mm
	45°: 64 mm
Blade Diameter	260 mm
No Load Speed (RPM)	4,300
Max cutting width	on the right side of blade: 630 mm
Net weight	34.8 - 35.1 kg
Power supply cord	2.5 m (8.2 ft)

*Standard with Blade Part No. D-46408

* There is limited stock on some of the models. Please confirm availability.

MITRE & TABLE SAWS

LS0815FLN

1,400W, 216mm Slide Compound Mitre Saw

Mitre Saw



- Cuts up to 305 mm at 90° and 215 mm at 45°
- Built-in LED light illuminates the line of the cut
- Class II laser enables accurate alignment of blade and cutting line
- Soft start for smooth start-ups
- Electronic brake for operator safety



JM23500117



Continuous rating input	1,400W
Blade Diameter	216 mm (8-1/2")
Mitre Angle	50° L / 60° R
Bevel Angle	48° L / 5° R
Max Cutting Capacity	0° Miter: 65 x 305 mm (2-9/16" x 12") 45° Miter, L/R: 65 x 215 mm (2-9/16" x 8-1/2")
No Load Speed (RPM)	5,000
Sound Pressure Level	87 dB(A)
Sound Power Level	110 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	755 x 450 x 488 mm
Net weight	14.1 kg
Power supply cord	2.5 m

*Standard with Blade Part No. B-39506

LS1040N

1,650W, 260mm Compound Mitre Saw

Mitre Saw



- Pivoting fence for supporting larger material
- Positive mitre stops at 9 settings: 15°, 22.5°, 30°, 45° right or left and 0° (90° cuts)
- Electronic brake for operator safety
- Mitre cuts 0°- 45° left and 0°- 52° right
- Bevel cuts up to 45° to the left



155



Continuous rating input	1,650W
Blade Diameter	260 mm (10-1/4")
Mitre Angle	45° L / 52° R
Bevel Angle	45° L
Max Cutting Capacity	0°: 90.5 x 95 mm 45°: 90.5 x 67 mm
No Load Speed (RPM)	4,600
Sound Pressure Level	93 dB(A)
Sound Power Level	106 dB(A)
Dimensions (L x W x H)	530 x 476 x 532 mm
Net weight	12.4 kg
Power supply cord	2.5 m

*Standard with Blade Part No. A-83696

LS1018LN

1,430W, 260mm Slide Compound Mitre Saw

Mitre Saw



- Class II laser enables accurate alignment of blade and cutting line
- Soft start for smooth start-ups
- Electronic brake for operator safety
- Cuts up to 305 mm at 90° and 215 mm at 45°
- Mitres 0°- 47° left and 0°- 60° right, with positive stops at 0° 15°, 22.5°, 31.6°, 45° right or left and 0° (90° cuts)



JM23000123



Continuous rating input	1,430W
Blade Diameter	255 - 260 mm (10 - 10-1/4")
Mitre Angle	47° L / 60° R
Bevel Angle	45° L / 45°
Max Cutting Capacity	0°: 91 x 305 mm (3-5/8" x 12") 45°: 91 x 215 mm (3-5/8" x 8-1/2")
No Load Speed (RPM)	4,300
Sound Pressure Level	97 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	825 x 536 x 633 mm
Net weight	20.6 kg
Power supply cord	2.5 m

*Standard with Blade Part No. JM23100005

LS1019L

1,510W, 260mm Single Slide Compound Mitre Saw

Mitre Saw



- Rail-forward design for compact storage
- Single sliding system enables smooth operation
- Class II laser enables accurate alignment of blade and cutting line
- Soft start for smooth start-ups
- Electronic speed control
- Electronic brake for operator safety
- Capacity for up to 168 mm crown molding (vertically nested), 133 mm baseboard (vertical) and 310 mm crosscuts at 90°
- Mitres 0°- 60° left and right, with positive stops at 0° 15°, 22.5°, 31.6°, 45° and 60° (left and right)



155



Continuous rating input	1,510W
Blade Diameter	255 - 260 mm (10-1/4")
Bevel Angle	48° L / 48° R
Mitre Angle	60° L / 60° R
Max Cutting Capacity	0°/0°: 68 x 310 mm (Bevel/Miter) 0°/45°LR: 91 x 197 mm
No Load Speed (RPM)	3,200
Sound Pressure Level	91 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	805 x 644 x 660 mm
Net weight	26.3 kg
Power supply cord	2.5 m

LS1219L

1,800W, 305mm Single Slide Compound Mitre Saw

Mitre Saw



- Rail-forward design for compact storage
- Single sliding system enables smooth operation
- Class II laser enables accurate alignment of blade and cutting line
- Soft start for smooth start-ups
- Electronic speed control
- Electronic brake for operator safety
- Capacity for up to 203 mm crown molding (vertically nested), 171 mm baseboard (vertical) and 382 mm crosscuts at 90°
- Mitres 0°- 60° left and right; bevels 0°- 48° left and right



155



Continuous rating input	1,800W
Blade Diameter	305 mm (12")
Bevel Angle	48° L / 48° R
Mitre Angle	60° L / 60° R
Max Cutting Capacity	0°: 107 x 363 Miter 45°: L/R 107 x 255 mm
No Load Speed (RPM)	3,200
Sound Pressure Level	91 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	898 x 664 x 725 mm
Net weight	29.5 kg
Power supply cord	2.5 m

* There is limited stock on some of the models. Please confirm availability.

IMPACT DRILLS

HP0300

320W, 10mm Hammer Driver Drill with Keyless Chuck

Hammer Driver Drill



- 3-Mode operation: Rotation Only / Hammering with Rotation / Screwdriver mode
- 20 Clutch torque settings in Screwdriver mode
- Variable speed control
- Forward and reverse



410



Continuous rating input	320W
Capacity	Concrete: 8 mm (5/16")
	Steel: 10 mm (3/8") Wood: 28 mm (1-1/8")
Chuck Capacity	1.0 - 10 mm (1/32 - 3/8")
Blows Per Minute (BPM)	High: 0 - 22,500 Low: 0 - 6,750
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 450
Max Fastening Torque	Hard / Soft: 56.0 / 21.0 N·m (500 / 190 in.lbs.)
Max lock torque	42.0 N·m (370 in.lbs.)
Vibration Level	Impact Drilling into Concrete: 12.5 m/s ²
	Drilling into Metal: 2.5 m/s ² or less
Dimensions (L x W x H)	235 x 67 x 206 mm
Net weight	1.3 kg
Power supply cord	2.5 m

HP1640

680W, Impact Drill with 13mm Keyed Chuck

Impact Drill



- Forward and reverse
- Depth gauge
- Variable speed 0 - 2,800 PRM and 0 - 44,800 IPM
- 360° Swivel side handle
- 2-Mode operation: Rotation Only / Hammering with Rotation



419



Continuous rating input	680W
Capacity	Concrete: 16 mm (5/8")
	Steel: 13 mm (1/2")
	Wood: 30 mm (1-3/16")
Chuck Capacity	1.5 - 13 mm
No Load Speed (RPM)	0 - 2,800
Impacts Per Minute (IPM)	0 - 44,800
Vibration Level	Hammer Drilling into Concrete: 19 m/s ²
	Drilling Into Metal: 2.5 m/s ²
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Dimensions (L x W x H)	303 x 72 x 222 mm
Net weight	2.0 kg
Power supply cord	2.0 m

HP1630

710W, Impact Drill with 13 mm Keyed Chuck

Impact Drill



- Aluminium gear housing
- Forward and reverse
- Depth gauge
- Torque limiter
- Variable speed 0 - 3,200 RPM and 0 - 44,800 IPM
- 360° Swivel side handle
- 2-Mode operation: Rotation Only / Hammering with Rotation



85



Continuous rating input	710W
Capacity	Concrete: 16 mm (5/8")
	Steel: 13 mm (1/2")
	Wood: 30 mm (1-3/16")
Chuck Capacity	1.5 - 13 mm
No Load Speed (RPM)	0 - 3,200
Impacts Per Minute (IPM)	0 - 48,000
Vibration Level	Hammer Drilling into Concrete: 17.0 m/s ²
	Drilling Into Metal: 2.5 m/s ²
Sound Pressure Level	97 dB(A)
Sound Power Level	108 dB(A)
Dimensions (L x W x H)	296 x 75 x 204 mm
Net weight	2.1 kg
Power supply cord	2.0m

HP2050

720W, Impact Drill with 13mm Keyed Chuck

Impact Drill



- Aluminium gear housing
- Forward and reverse
- Depth gauge
- Torque limiter
- Variable 2-speed (0 - 1,200 and 0 - 2,900 RPM) with variable speed control dial
- 0 - 58,000 IPM
- Large trigger switch and 360° swivel side handle



419



Continuous rating input	720W
Capacity	Concrete: 20 mm (3/4")
	Steel Hi: 8 mm (5/16")
	Steel Lo: 13 mm (1/2")
	Wood Hi: 25 mm (1")
	Wood Lo: 40 mm (1-9/16")
Chuck Capacity	1.5 - 13 mm
Impacts Per Minute (IPM)	High: 0-58,000 Low: 0-24,000
No Load Speed (RPM)	High: 0-2,900 Low: 0-1,200
Overall Length	362 mm
Net weight	2.5 kg
Power supply cord	2.5 m

HP2051

720W, Impact Drill 13mm Keyless Chuck

Impact Drill



- Aluminium gear housing
- Forward and reverse
- Depth gauge
- Torque limiter
- Variable 2-speed (0 - 1,200 and 0 - 2,900 RPM) with variable speed control dial
- 0 - 58,000 IPM
- Large trigger switch and 360° swivel side handle



419



Continuous rating input	720W
Capacity	Concrete: 20 mm (3/4")
	Steel Hi: 8 mm (5/16")
	Steel Lo: 13 mm (1/2")
	Wood Hi: 25 mm (1")
	Wood Lo: 40 mm (1-9/16")
Chuck Capacity	1.5 - 13 mm
Impacts Per Minute (IPM)	High: 0-58,000 Low: 0-24,000
No Load Speed (RPM)	High: 0-2,900 Low: 0-1,200
Overall Length	360 mm
Net weight	2.5 kg
Power supply cord	2.5 m

HP2070

1,010W, Impact Drill with 13mm Keyed Chuck

Impact Drill



- Aluminium gear housing
- Forward and reverse
- Depth gauge
- Torque limiter
- Variable 2-speed (0 - 1,200 and 0 - 2,900 PRM) with variable speed control dial
- 0 - 58,000 IPM
- Large trigger switch and 360° swivel side handle



419



Continuous rating input	1,010W
Capacity	Concrete: 20 mm (3/4")
	Steel Hi: 8 mm (5/16")
	Steel Lo: 16 mm (5/8")
	Wood Hi: 25 mm (1")
	Wood Lo: 40 mm (1-9/16")
Impacts Per Minute (IPM)	High: 0-58,000 Low: 0-24,000
No Load Speed (RPM)	High: 0-2,900 Low: 0-1,200
Overall Length	364 mm
Net weight	2.6 kg
Power supply cord	2.5 m

* There is limited stock on some of the models. Please confirm availability.

IMPACT WRENCHES

TW0200

380W, 200 N·m Impact Wrench, 12.7mm Square Drive (1/2")

Impact Wrench



- Compact and lightweight design for use in tight spaces
- Variable speed 0 - 2,200 RPM
- Aluminium gear case with rubber boot



410



Continuous rating input	380W
Fastening Capacities	
Standard Bolt:	M10 - M16 (3/8" - 5/8")
High Tensile Bolt:	M10 - M12 (3/8" - 1/2")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,200
Impacts Per Minute (IPM)	0 - 2,200
Max Fastening Torque	200 N·m (150 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 8.5 m/s ²
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	251 x 72 x 220 mm
Net weight	2.1 kg
Power supply cord	2.5 m

TW0350

400W, 350 N·m Impact Wrench, 12.7mm Square Drive (1/2")

Impact Wrench



- Rocker type switch for one-handed forward or reverse operation
- Efficient impact system with less vibration
- Aluminium gear case with rubber boot



410



Continuous rating input	400W
Fastening Capacities	
Standard Bolt:	M12 - M22 (1/2" - 7/8")
High Tensile Bolt:	M12 - M16 (1/2" - 5/8")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	2,000
Impacts Per Minute (IPM)	2,000
Max Fastening Torque	350 N·m (260 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 11.5 m/s ²
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	283 x 87 x 233 mm
Net weight	3 kg
Power supply cord	2.5 m

6906

620W, 588 N·m Impact Wrench, 19mm Square Drive (3/4")

Impact Wrench



- 588 N·m of torque for heavy duty applications
- Rocker type switch for one-handed forward or reverse operation
- Heavy duty rubber bumper



105



Continuous rating input	620W
Capacity	
Standard Bolt:	M16 - M22 (5/8" - 7/8")
High Tensile Bolt:	M16 - M20 (5/8" - 3/4")
Square Drive	19 mm (3/4")
No Load Speed (RPM)	1,700
Impacts Per Minute (IPM)	1,600
Max Fastening Torque	588 N·m (441 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 16.5 m/s ²
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Overall Length	327 mm
Net weight	5.6 kg
Power supply cord	2.5 m

TW1000

1,200W, 1,000 N·m Impact Wrench, 25.4mm Square Drive (1")

Impact Wrench



- 1,000 N·m of torque for industrial applications
- Efficient impact system (1,500 IPM)
- Aluminium gear case with rubber boot
- Rocker switch with forward/reverse operation
- Friction ring anvil with retaining ring hole for secure socket retention



155



Continuous rating input	1,200W
Capacity	
Standard Bolt:	M24 - M30 (1 1/16" - 1 3/16")
High Tensile Bolt:	M22 - M24 (7/8" - 1 5/16")
Square Drive	25.4 mm (1")
No Load Speed (RPM)	1,400
Impacts Per Minute (IPM)	1,500
Max Fastening Torque	1,000 N·m (738 ft.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 17.5 m/s ²
Sound Pressure Level	103 dB(A)
Sound Power Level	114 dB(A)
Overall Length	382 x 110 x 290 mm
Net weight	8.8 kg
Power supply cord	2.5 m



JIG SAWS

4329K

450W Top Handle Jig Saw

Jig Saw



- 3 Orbital settings plus straight cutting
- Variable speed control dial (500 - 3,100 SPM)
- Bevel cuts to 45° right or left and positive stop at 90°
- Uses bayonet type blades
- Large 2-finger trigger switch



63 mm



Continuous rating input	450W
Max Cutting Capacity at 0°	Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	500 - 3,100
Vibration Level	Cutting Wood: 7.0 m/s ² Cutting Sheet Metal: 5.0 m/s ²
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Bevel Range	0 - 45°
Dimensions (L x W x H)	223 x 77 x 197 mm
Net weight	1.9 kg
Power supply cord	2.0 m

JV0600K

650W Top Handle Jig Saw

Jig Saw



- 3 Orbital settings plus straight cutting
- Variable speed control dial (500 - 3,100 SPM)
- "Tool-less" blade change system
- Built-in dust blower clears the line of cut
- Die-cast aluminium base adjusts from 0° - 45° right or left



63 mm



Continuous rating input	650W
Capacity	Wood: 90 mm (3-1/2") Steel: 10 mm (3/8")
Length of Stroke	23 mm (7/8")
Strokes Per Minute (SPM)	500 - 3,100
Bevel Range	0 - 45°
Dimensions (L x W x H)	236 x 77 x 199 mm
Net weight	2.4 kg
Power supply cord	2.5 m

4350FCT

720W Top Handle Jig Saw

Jig Saw



- Variable speed control dial (800 - 2,800 SPM)
- Constant speed control maintains constant speed under load
- Soft start for smooth start-ups
- "Tool-less" blade change system
- 3 Mode oscillating allows faster cutting



419 mm



Continuous rating input	720W
Capacity	Wood: 135 mm (5-5/16") Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 2,800
Bevel Range	0 - 45°
Dimensions (L x W x H)	236 x 73 x 207 mm
Net weight	2.7 kg
Power supply cord	2.5 m

RECIPRO SAWS

JR3061T

1250W, Recipro Saw

Recipro Saw



NEW

- LED job light illuminates the work area
- Retractable rafter hook allows to hang the machine on ladder rungs or guard rails of aerial work platform
- Variable speed trigger for precise cutting in a wide variety of applications
- "Tool-less" blade change system enables fast, one-handed blade changes
- "Tool-less" shoe adjustment allows operator to quickly adjust shoe position
- Long 32 mm stroke for faster cutting
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation



304 mm



Continuous rating input	1,250W
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 3,000
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 18.5 m/s ² Cutting Wooden Beams: 16.5 m/s ²
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	487 x 95 x 177 mm
Net weight	3.8 kg
Power supply cord	2.5 m

JR3070CT

1510W, Recipro Saw

Recipro Saw



- Extra-low vibration and extra power
- Feel its comfort with this machine featuring AVT; counterweight mechanism which helps to reduce vibration
- Makita's top-end powerful reciprocating saw
- Preset dial for speed control for optimal stroke speed for application
- Low vibration and low noise level
- Ergonomic soft rubber grip design for vibration absorption and comfortable operation



304 mm



Continuous rating input	1,510W
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 9.5 m/s ² Cutting Wooden Beams: 10.5 m/s ²
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Overall Length	485 mm
Net weight	4.6 kg
Power supply cord	2.5 m

* There is limited stock on some of the models. Please confirm availability.

LASER LEVELS & DISTANCE MEASURES

LD050P

Laser Distance Measure

Laser Distance Measure



- Multiple measurement functions
- Dust and water resistance with a IP54 rating
- Measuring distance operating range up to 50 m
- Provides accuracy of +/- 2 mm
- Provides 7 measurement functions: Distance, Area, Volume, Permanent, Min/Max, Add/Subtract, Pythagoras (2 point), Pythagoras (3 point)
- Battery run time delivers up to 5,000 measurements
- Records history of 5 measurements
- Auto power-off function automatically shuts the device off



Measuring Range	0.05 - 50 m
Typical Measuring Tolerance	+/- 2.0 mm / 10 m
Max Measuring Tolerance	+/- 3.0 mm / 10 m
Laser Point	6mm at 10 m
Laser Class	2
Laser Type	635nm, <1 mW
Protection Class	IP54
Power Supply	Cell battery: AAA 1.5 V x 2 pcs
Net Weight	0.1 kg

STANDARD EQUIPMENT:
Pouch, strap, 2 x AAA batteries.

LD080PI

Laser Distance Measure

Laser Distance Measure



- Dust and water resistance with a IP54 rating
- Measuring distance operating range up to 80 m
- Provides accuracy of +/- 1.5 mm
- There are 9 measurement functions: Distance, Area, Volume, Permanent, Min/Max, Add/Subtract, Stake-Out, Pythagoras (2 point), Pythagoras (3 point), Pythagoras (partial height)
- Battery run time delivers up to 5,000 measurements
- Records history of 20 measurements
- Auto power-off function automatically shuts the device off



Measuring Range	0.05 - 80 m
Typical Measuring Tolerance	+/- 1.5 mm / 10 m
Max Measuring Tolerance	+/- 2.5 mm / 10 m
Laser Point	6 mm at 10 m
Laser Class	2
Laser Type	635 nm, <1 mW
Protection Class	IP54
Power Supply	Cell battery: AAA 1.5 V x 2pcs
Net Weight	0.14 kg

STANDARD EQUIPMENT:
Pouch, strap, 2 x AAA batteries.

NIBBLERS & SHEARS

JN1601

550W, Metal Working Nibbler, 1.6mm (16Ga)

Nibbler



- Precise, burr-free curved and straight cuts from slim, yet powerful performer
- Cuts flat and corrugated sheet metal with the same die
- Die rotates 360 degrees, large 1/4" stroke
- Built-in thickness gauge for convenience



410 mm



Continuous rating input	550W
Capacity	
Steel up to 400 N/mm ²	1.6 mm
Steel up to 600 N/mm ²	1.2 mm
Steel up to 800 N/mm ²	0.8 mm
Aluminium up to 200 N/mm ²	2.5 mm
Min. cutting radius	Outside edge : 50 mm (2") Inside edge : 45 mm (1-3/4")
Strokes Per Minute (SPM)	2,200
Overall Length	261 mm
Net weight	1.6 kg
Power supply cord	2.0 m

JN3201J

710W, Metal Working Nibbler, 3.2mm (10Ga)

Nibbler



- Robust design with elastomer coated handle provides easy operation.
- On-tool storage for hex wrench



304 mm



Continuous rating input	710W
Capacity	
Steel up to 400 N/mm ²	3.2 mm
Steel up to 600 N/mm ²	2.5 mm
Steel up to 800 N/mm ²	1.0mm
Aluminium up to 200 N/mm ²	3.5 mm
Min. cutting radius	Outside edge : 128 mm Inside edge : 120 mm ()
Strokes Per Minute (SPM)	1,300
Dimensions (LxWxH)	225 x 90 x 254 mm
Net weight	3.4 kg
Power supply cord	2.5 m

JS1601

380W, Metal Straight Shear 1.6mm (16Ga)

Metal Straight Shear



- Ingenious aesthetic design provides more control and manoeuvrability
- Mainly for straight cutting
- Ergonomically best possible barrel grip for straight shear
- Rear cover ergonomically tapered for easy grip



459 mm



Continuous rating input	380W
Capacity	
Steel up to 400 N/mm ²	1.6 mm
Steel up to 600 N/mm ²	1.2 mm
Steel up to 800 N/mm ²	0.8 mm
Aluminium up to 200 N/mm ²	2.5 mm
Min. cutting radius	250 mm (9-7/8")
Strokes Per Minute (SPM)	4,500
Dimensions (LxWxH)	320 x 70 x 78 mm
Net weight	1.4 kg
Power supply cord	2.5 m

* There is limited stock on some of the models. Please confirm availability.

NIBBLERS & SHEARS

JS1602

380W, Metal Shear 1.6mm (16Ga)

Metal Shear



- Slim motor housing and rear cover provides more control and better manoeuvrability
- Conveniently located slide switch for one hand operation



Continuous rating input	380W
Capacity	
Steel up to 400 N/mm ²	1.6 mm
Steel up to 600 N/mm ²	1.2 mm
Steel up to 800 N/mm ²	0.8 mm
Aluminium up to 200 N/mm ²	2.5 mm
Min. cutting radius	30 mm (1-3/16")
Strokes Per Minute (SPM)	4,000
Dimensions (LxWxH)	255 x 74 x 146 mm
Net weight	1.6 kg
Power supply cord	2.5 m

JS3201J

710W, Shear 3.2mm

Shear



- Robust design with elastomer coated handle provides easy operation
- On-tool storage for hex wrench



Continuous rating input	710W
Capacity	
Steel up to 400 N/mm ²	3.2 mm
Steel up to 600 N/mm ²	2.5 mm
Steel up to 800 N/mm ²	1.5 mm
Aluminium up to 200 N/mm ²	4.0 mm
Min. cutting radius	50 mm (2")
Strokes Per Minute (SPM)	1,600
Dimensions (LxWxH)	213 x 90 x 239 mm
Net weight	3.4 kg
Power supply cord	2.5 m

PLANERS

KP0800K

620W, Planer

Planer



- Angle and shape of handle are easy to grip, push and carry
- Precise planing depth setting by adjustment knob with click stops
- Deep planing
- Tool does not come with dust bag



Continuous rating input	620W
Rebate	9 mm
Planing Width	82 mm (3-1/4")
Planing Depth	2.5 mm (3/32")
No Load Speed (RPM)	17,000
Dimensions (L x W x H)	285 x 158 x 158 mm
Net weight	2.8 kg
Power supply cord	2.5 m


KP0810K

850W, Planer

Planer



- Lightweight design for easy handling
- Chip ejection can be switched to either side depending on conditions
- Front base with 3 chamfering grooves
- Foot on base protects work piece from scratches and damages
- Precise depth adjustment knob
- Tool does not come with dust bag



Continuous rating input	850W
Rebate	25 mm
Planing Width	82 mm (3-1/4")
Planing Depth	4 mm (5/32")
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	290 x 168 x 176 mm
Net weight	3.3 kg
Power supply cord	2.5 m

THICKNESSER

2012NB

1650W, Thicknesser 304mm

Thicknesser



- Compact and lightweight for easier transport
- Unique feeding mechanism assures smoother finish with minimal snip on stock
- 4-post design and diagonal cross supports for stability



Continuous rating input	1,650W
Cutting Width	304 mm (12")
Cutting depth	Cutting width 0 - 150 mm : 3 mm (1/8")
	Cutting width 150-240 mm : 1.5 mm (1/16")
Feed rate/min.	8.5 m
Table Size (W x L)	304 x 771 mm
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	483 x 771 x 401 mm
Net weight	27.1 - 27.6 kg
Power supply cord	2.5 m

* There is limited stock on some of the models. Please confirm availability.

RANDOM ORBIT & FINISHING SANDERS

TM3000CX2

320W, Multi Tool

Multi Tool



- With oscillating multi tool accessories
- Anti-restart function prevents accidental startup- 4-post design and diagonal
- Fully 360 degree multi angle setting enables users to position accessories in 12 different angles
- Ergonomically designed rubberized grip provides more control and comfort



459



Continuous rating input	320W
Strokes Per Minute (SPM)	6,000-20,000
Dimensions (L x W x H)	275 x 64 x 92 mm
Net weight	1.4 - 1.5 kg
Power supply cord	5.0 m

BO4555

200W, 1/4 Sheet Palm Sander

Palm Sander



- Powerful motor, low vibration, low noise
- Easy installation/removal of paper with rolled clamber's edges
- Ergonomically contoured grip with non-skid elastomer covered surface
- Durable aluminium foot with dust protection
- Hook and loop type abrasive paper can be used



419



Continuous rating input	200W
Pad Size	112 x 102 mm (4-3/8" x 4")
Abrasive Paper Size	114 x 102 mm (4-1/2" x 4")
Orbits Per Minute (OPM)	14,000
Dimensions (L x W x H)	131 x 112 x 141 mm
Net weight	1.1 kg
Power supply cord	2.0 m

BO3710

190W, 1/3 Sheet, Finishing Sander

Finishing Sander



- Ergonomic tool body fits user's hand perfectly, providing sure grip and easy handling whether in single or double handed operation
- Durable aluminium foot with dust protection
- Easy to operate paper clamp with large clamp lever ensures quick and easy paper replacement



64



Continuous rating input	190W
Pad Size	93 x 185 mm (3-5/8" x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8" x 9")
Orbits Per Minute (OPM)	11,000
Strokes Per Minute (SPM)	22,000
Orbit Diameter	2.0 mm (1/16")
Vibration Level	Sanding Metal Plate: 3.5 m/s ²
Sound Pressure Level	72 dB(A)
Dimensions (L x W x H)	253 x 92 x 154 mm
Net weight	1.6 kg
Power supply cord	2.0 m

BO4900

330W, 1/2 Sheet, Finishing Sander

Finishing Sander



- Through-the-Pad Dust Collection System
- Minimized vibration and contoured grips for added comfort
- Large trigger switch for easier operation
- Ideal for cabinet workers, boat builders or furniture makers
- Easily attached to a vacuum hose



419



Continuous rating input	330W
Pad Size	115 x 229 mm (4-1/2" x 9")
Abrasive Paper Size	115 x 232 mm (4-1/2" x 9-1/8")
Orbits Per Minute (OPM)	10,000
Overall Length	289 mm
Net weight	2.9 kg
Power supply cord	2.5 m

9046

600W, 1/2 Sheet, Finishing Sander

Finishing Sander



- Powerful performer for professionals needs
- Accepts standard abrasive paper; also accepts hook & loop abrasive paper



419



Continuous rating input	600W
Pad Size	115 x 229 mm (4-1/2" x 9")
Abrasive Paper Size	115 x 280 mm (4-1/2" x 11")
Orbits Per Minute (OPM)	6,000
Overall Length	283 mm
Orbit Diameter	5 mm (3/16")
Net weight	3.0 kg
Power supply cord	2.5 m

BO5031

300W, 125 mm, Random Orbital Sander

Random Orbital Sander



- Powerful motor and high durability
- Ergonomically designed rubberized top-cover and body provide more control and comfort
- Rubber switch cover prevents ingress of dust
- Convenient pad brake for fast stop
- Speed control dial



419



Continuous rating input	300W
Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	4,000-12,000
Dimensions (L x W x H)	153 x 123 x 153 mm
Net weight	1.3 kg
Power supply cord	2.0 m

RANDOM ORBIT & FINISHING SANDERS

BO5041

300W, 125mm, Random Orbital Sander

Random Orbital Sander



- High power motor and high durability
- Ergonomically designed body and rotatable front grip provides more control and comfort
- High dust extraction rate
- Speed control dial



64 mm



Continuous rating input	300W
Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	4,000-12,000
Dimensions (L x W x H)	218 x 123 x 153mm
Net weight	1.4 kg
Power supply cord	2.0 m

BO6030

310W, 150mm, Random Orbital Sander

Random Orbital Sander



- Exceptionally low vibration, yet aggressive sanding
- Through the pad dust collection system
- Pad control system prevents gouging
- Variable speed control dial to match the sanding speed to the material



419 mm



Continuous rating input	310W
Pad Diameter	150 mm (6")
Abrasive Disc Size	150 mm (6")
Orbits Per Minute (OPM)	4,000-10,000
Overall Length	309 mm
Overall Diameter	3.0 mm (1/8")
Net weight	2.4 kg
Power supply cord	2.5 m

BO6050J

750W, 150mm, Random Orbital Sander

Random Orbital Sander



- Ergonomically designed palm grip with elastomer
- "Tool-less" pad change
- Slim skirt provides higher work efficiency in tight spaces
- Change lever protection system: When the switch is in ON position, the change lever is automatically locked for protection from damage caused by rotating armature.
- Two sanding modes: Random orbit mode for finish sanding and buffing; Roto-orbit mode for coarse sanding and polishing



325 mm



Continuous rating input	750W
Pad diameter	150 mm (6")
Abrasive Disc Size	150 mm (6")
Orbits Per Minute (OPM)	1,600 - 6,800
Sanding Strokes Per Minute (SPM)	3,200 - 13,600
Pad speed in Roto-orbit mode (rpm)	140 - 600
Orbit Diameter	5.5 mm (7/32")
Vibration Level	Sanding Metal Plate: 5.0 m/s ²
	Polishing: 3.0 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	330 x 155 x 145 mm
Net weight	2.6 kg
Power supply cord	2.5 m

SANDER POLISHER

9237CB

1200W, Sander Polisher

Sander Polisher



- Loop handle with rubberized soft grip
- Variable speed control dial, rotation speed is adjustable to application
- Elastomer bumper protects surfaces from damage and scratches



304 mm



Continuous rating input	1,200W
Capacity	Wool Pad: 180 mm (7")
	Wool Bonnet: 180 mm (7")
No Load Speed (RPM)	0 - 3,200
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	431 x 198 x 187 mm
Net weight	3.2 - 3.4 kg
Power supply cord	2.5 m

ROTARY HAMMERS


HR2230

710W, 22mm, 2.2 Joules, Rotary Hammer, SDS-Plus

Rotary Hammer



- 2 Operation modes – hammering with rotation and rotation only
- One-touch sliding chuck enables easy bit change
- Easy-to-operate large trigger switch and lock-on button



325 mm



Continuous rating input	710W
Capacity	Concrete (w/ TCT Bit): 22 (7/8")
	Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,050
No Load Speed (RPM)	0 - 1,050
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15 m/s ²
Dimensions (L x W x H)	357 x 84 x 214 mm
Net weight	2.6 - 3.1 kg
Power supply cord	2.5 m

* There is limited stock on some of the models. Please confirm availability.
* Although Rotary Hammers are portrayed with a bit they are sold without bits.

ROTARY HAMMERS

HR2475

780W, 24mm, 2.3 Joules, Rotary Hammer, SDS-Plus

Rotary Hammer



- 3 Operation modes – hammering, hammering with rotation & rotation only
- Ergonomic D-Shaped handle with rubberized soft grip provides more comfort and better control
- One-touch sliding chuck for easy bit change



Continuous rating input	780W
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ²
Dimensions (L x W x H)	429 x 84 x 158 mm
Net weight	3.0 - 3.4 kg
Power supply cord	4.0 m

HR2600

800W, 26mm, 2.4 Joules, Rotary Hammer, SDS-Plus

Rotary Hammer



- 2 Operation modes – hammering with rotation and rotation only
- One-touch sliding chuck enables easy bit change
- Torque limiter



Continuous rating input	800W
Capacity	Concrete (w/ TCT Bit): 26 mm (1") Concrete (w/ Diamond Core Bit): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.5 m/s ²
Dimensions (L x W x H)	361 x 77 x 209 mm (14-1/4"x3"x8-1/4")
Net weight	3 - 3.4 kg
Power supply cord	2.5 m

HR2670

800W, 26mm, 3.0 Joules, Combination Hammer, SDS-Plus

Combination Hammer



NEW

- 3 Operation modes – hammering, hammering with rotation & rotation only
- Torque limiter
- Normal chuck



Continuous rating input	800W
Capacity	Concrete: 26 mm (1") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,500
Sound Pressure Level	94 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete: 16.1 m/s ² Chiselling: 14.2 m/s ²
Dimensions (L x W x H)	362 x 77 x 207 mm
Net weight	2.9 - 3.4 kg
Power supply cord	4.0 m

HR2670FT

800W, 26mm, 3.0 Joules, Combination Hammer, SDS-Plus

Rotary Hammer



NEW

- 3 Operation modes – hammering, hammering with rotation & rotation only
- Torque limiter
- Quick change drill chuck
- Features a built-in LED job light



Continuous rating input	800W
Capacity	Concrete: 26 mm (1") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,500
Sound Pressure Level	94 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.7 m/s ² Chiselling: 14.0 m/s ²
Dimensions (L x W x H)	362 x 77 x 207 mm
Net weight	3.1 - 3.3 kg
Power supply cord	4.0 m

HR2630

800W, 26mm, 2.4 Joules, Rotary Hammer, SDS-Plus

Rotary Hammer



- 3 Operation modes – hammering, hammering with rotation & rotation only
- Torque limiter
- One-touch sliding chuck for easy bit change



Continuous rating input	800W
Capacity	Concrete: 26 mm (1") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 15.0 m/s ²
Dimensions (L x W x H)	385 x 77 x 209 mm
Net weight	2.8 - 3.3 kg
Power supply cord	2.5 m


HR2631F

800W, 26mm, 2.4 Joules, Rotary Hammer, SDS-Plus

Rotary Hammer



- 3 Operation modes – hammering, hammering with rotation & rotation only
- Torque limiter
- One-touch sliding chuck for easy bit change
- Features a built-in LED job light
- Feel its comfort with this machine featuring AVT; counterweight mechanism which helps to reduce vibration



Continuous rating input	800W
Capacity	Concrete: 26 mm (1") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling into Concrete: 12.0 m/s ²
Dimensions (L x W x H)	361 x 77 x 209 mm
Net weight	2.9 - 3.4 kg
Power supply cord	2.5 m

ROTARY HAMMERS


HR2810

800W, 26mm, 2.8 Joules, Rotary Hammer, SDS-Plus

Rotary Hammer



- 3 Operation modes – hammering, hammering with rotation & rotation only
- Most efficient in its class for both drilling and chipping
- One-touch sliding chuck for easy bit change
- Ergonomically designed handle with rubberized soft grip provides more control and comfort



325 mm



Continuous rating input	800W
Capacity	Concrete (w/ TCT Bit): 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 20 m/s ²
Dimensions (L x W x H)	314 x 89 x 225 mm
Net weight	3.4 - 3.8 kg
Power supply cord	2.5 m


HR3200C

800W, 26mm, 5.1 Joules, Rotary Hammer, SDS-Plus

Rotary Hammer



- 3 Operation modes – hammering, hammering with rotation & rotation only
- One-touch sliding chuck for easy bit change
- Ergonomically designed handle with rubberized soft grip provides more control and comfort



350 mm



Continuous rating input	850W
Capacity	Concrete (w/ TCT Bit): 32 mm (1-1/4") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	1,650 - 3,300
No Load Speed (RPM)	315 - 630
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Vibration Level	Hammer Drilling into Concrete: 18.0 m/s ²
Dimensions (L x W x H)	398 x 108 x 239 mm
Net weight	4.8 - 5.2 kg
Power supply cord	5.0 m

HR4002

1.050W, 40mm, 6.1 Joules, Rotary Hammer, SDS-Max

Rotary Hammer



- 2 Operation modes – Hammering with rotation (for drilling) and hammer only (for chipping and breaking)
- High speed efficiency
- One-touch sliding chuck for easy bit change
- Ergonomically designed handle with rubberized soft grip provides more control and comfort



350 mm



Continuous rating input	1,050W
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16") Concrete (w/ Core Bit): 105 mm (4-1/8")
Blows Per Minute (BPM)	2,500
No Load Speed (RPM)	680
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Hammer Drilling into Concrete: 17.5 m/s ²
Dimensions (L x W x H)	458 x 114 x 256 mm
Net weight	6.6 - 6.8 kg
Power supply cord	5.0 m

HR4003C

1,100W, 40mm, 8.3 Joules, Rotary Hammer SDS-Max

Rotary Hammer



- 2 Operation modes – Hammering with rotation (for drilling) and hammer only (for chipping and breaking)
- Most powerful and efficient in the class
- New "Two on / off switches switchable in hammering mode"
- Easy-to-operate operation mode change lever



350 mm



Continuous rating input	1,100W
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16") Concrete (w/ Core Bit): 105 mm (4-1/8")
Blows Per Minute (BPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Hammer Drilling into Concrete: 10.0 m/s ²
Dimensions (L x W x H)	479 x 106 x 263 mm
Net weight	6.2 - 6.4 kg
Power supply cord	5.0 m

HR4013C

1,100W, 40mm, 8.0 Joules, Rotary Hammer SDS-Max

Rotary Hammer



- 2 Operation modes – Hammering with rotation (for drilling) and hammer only (for chipping and breaking)
- High efficiency and unrivalled low level of vibration. (Anti-Vibration Technology)
- New "Two on / off switches switchable in hammering mode"
- Easy-to-operate operation mode change lever.



350 mm



Continuous rating input	1,100W
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16") Concrete (w/ Core Bit): 105 mm (4-1/8")
Blows Per Minute (BPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Hammer Drilling into Concrete: 10.0 m/s ²
Dimensions (L x W x H)	479 x 106 x 263 mm
Net weight	6.8 - 6.9 kg
Power supply cord	5.0 m

HR5212C

1,510W, 52mm, 20.0 Joules, Rotary Hammer, SDS-Max

Rotary Hammer



- 2 Operation modes – Hammering with rotation (for drilling) and hammer only (for chipping and breaking)
- High efficiency and unrivalled low level of vibration. (Anti-Vibration Technology)
- New "Two on / off switches switchable in hammering mode"
- Easy-to-operate operation mode change lever.



350 mm



Continuous rating input	1,510W
Capacity	Concrete (w/ TCT Bit): 52 mm (2") Concrete (w/ Core Bit): 160 mm (6-5/16")
Blows Per Minute (BPM)	1,100 - 2,250
No Load Speed (RPM)	150 - 310
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Vibration Level	Hammer Drilling into Concrete: 9.0 m/s ²
Dimensions (L x W x H)	599 x 140 x 287 mm
Net weight	11.9 - 12.0 kg
Power supply cord	5.0 m

* Although Rotary Hammers are portrayed with a bit they are sold without bits.
* There is limited stock on some of the models. Please confirm availability.

ROUTERS

RP0900

900W, Plunge Type 6.35mm

Router



- High durability and well designed router
- 0 - 35mm Plunge depth capacity with 3 adjustable depth stops for repetitive depth routing
- Scale level for adjusting the depth of routing



113 mm



Continuous rating input	900W
Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
Plunge Capacity	0 - 35 mm (0 - 1-3/8")
No Load Speed (RPM)	27,000
Vibration Level	Cutting Grooves in MDF: 4.0 m/s ²
Sound Pressure Level	89 dB(A)
Sound Power Level	100 dB(A)
Dimensions (L x W x H)	110 x 256 x 217 mm
Net weight	2.7 kg
Power supply cord	2.5 m

RP1800X

1850W, Plunge Type 12.7mm

Router



- Powerful motor delivers smooth routing
- Precise cutting depth adjustment
- Ergonomically contoured knob style handles fit operator's hands perfectly



203 mm



Continuous rating input	1,850W
Collet Capacity	12 mm or 1/2"
Plunge Capacity	0 - 70 mm (0 - 2-3/4")
Base Diameter	170 mm (6-11/16")
No Load Speed (RPM)	22,000
Vibration Level	Cutting Grooves in MDF: 4.0 m/s ²
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	155 x 294 x 312 mm
Net weight	6 kg
Power supply cord	4.0 m


RP2301FCX

2100W, Variable Speed, Brake, Constant Speed, Soft Start, Dust Collecting, Built-in Light 12.7mm

Router



- Powerful motor delivers smooth routing
- Precise cutting depth adjustment
- Ergonomically contoured knob style handles fit operator's hands perfectly
- Twin LED job lights with afterglow function



204 mm



Continuous rating input	2,100W
Collet Capacity	12 mm or 1/2"
Plunge Capacity	0 - 70 mm (0 - 2-3/4")
No Load Speed (RPM)	9,000 - 22,000
Vibration Level	Cutting Grooves in MDF: 4.5 m/s ²
Sound Pressure Level	87 dB(A)
Sound Power Level	98 dB(A)
Dimensions (L x W x H)	155 x 294 x 312 mm
Net weight	6.1 kg
Power supply cord	4.0 m

TRIMMERS

RT0700C

710W, 6.35mm Trimmer

Trimmer



- Flat-top design and horizontally installed power supply cord provides stability for easier bit change
- Cutting speed is variably adjustable to suit applications and workpiece materials



410 mm



Continuous rating input	710W
Collet Capacity	6.35mm
No Load Speed (RPM)	10,000 - 30,000
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less
	Cutting Grooves in MDF: 3.5 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	89 x 89 x 200 mm
Net weight	1.8 - 2.7 kg
Power supply cord	2.5 m

RT0700CX2J

710W, 6.35mm Trimmer

Trimmer Kit



- Flat-top design and horizontally installed power supply cord provides stability for easier bit change
- Cutting speed is variably adjustable to suit applications and workpiece materials
- Includes plunge, tilt and trimmer base and a carry case



410 mm



Continuous rating input	710W
Collet Capacity	6.35mm
No Load Speed (RPM)	10,000 - 30,000
Vibration Level	Rotation w/o Load: 2.5 m/s ² or less
	Cutting Grooves in MDF: 3.5 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	89 x 89 x 200 mm
Net weight	1.8 - 2.7 kg
Power supply cord	2.5 m

SCREWDRIVERS

FS2300

570W, Drywall Screwdriver, for Timber Struts

Screwdriver



- Silent Clutch



419 mm



Continuous rating input	570W
Capacity	Drywall Screw: 5 mm (3/16")
	Self-Drilling Screw: 6 mm (1/4")
Driving Shank (Hex)No	6.35 mm (1/4")
Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	290 x 70 x 207 mm
Net weight	1.6 kg
Power supply cord	2.5 m

SCREWDRIVERS


FS4300

Screwdriver



570W, Drywall Screwdriver, for Aluminium Struts

- Silent Clutch



419



Continuous rating input	570W
Capacity	Drywall Screw: 5 mm (3/16")
	Self-Drilling Screw: 6 mm (1/4")
Driving Shank (Hex)No	6.35 mm (1/4")
Load Speed (RPM)	0 - 4,000
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	279 x 65 x 207 mm
Net weight	1.4 kg
Power supply cord	2.5 m

FS6300

Screwdriver



570W, Drywall Screwdriver, for Steel Struts

- Silent Clutch



419



Continuous rating input	570W
Capacity	Drywall Screw: 4 mm (5/32")
Driving Shank (Hex)No	6.35 mm (1/4")
Load Speed (RPM)	0 - 6,000
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	279 x 65 x 207 mm
Net weight	1.4 kg
Power supply cord	2.5 m

FS2500

Screwdriver



570W Screwdriver, for Tekes and Roofing

- One touch locator



419



Continuous rating input	570W
Capacity	Drywall Screw: 5 mm (3/16")
	Self-Drilling Screw: 6 mm (1/4")
Driving Shank (Hex)No	6.35 mm (1/4")
Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	280 x 70 x 207 mm
Net weight	1.5 kg
Power supply cord	2.5 m

FS2700

Screwdriver



570W, Screwdriver, Combination (Clutch Type)

- 6-Stage torque adjustment



419



Continuous rating input	570W
Capacity	Self-Drilling Screw: 6 mm (1/4")
	Machine Screw: 8 mm (5/16")
	Wood Screw: 6.2 mm (1/4")
Driving Shank (Hex)No	6.35 mm (1/4")
Load Speed (RPM)	0 - 2,500
Vibration Level	Screwdriving w/o Impact: 2.5 m/s ² or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	301 x 70 x 207 mm
Net weight	1.8 kg
Power supply cord	2.5 m

VACUUM CLEANER

VC2512L

Vacuum Cleaner



1,000W, Vacuum Cleaner (Wet & Dry)

- Approved for Dust Class L in accordance with the EU standard
- For both wet and dry vacuum cleaning
- Best suitable for working with power tools
- Push & Clean semi-automatic filter cleaning system for extended operating time and filter life
- When working with electric drilling, sanding or cutting tools the automatic start/stop function activates the machine when a connected power tool is used

Hose, Hand tube, Crevice Nozzle, Floor Nozzle, Tool adapter, Aluminum tube, Fleece filter bag, Disposal bag

Continuous rating input	1,000W
Max peak air flow	3.6 m ³ / min
Max Sealed Suction	21.0 kPa
Tank capacity	Dust : 21 L
	Water : 18 L
Sound level	72 dB(A)
Dimensions (L x W x H)	390 x 390 x 530 mm
Net weight	7.0 kg
Power supply cord	5 m

* There is limited stock on some of the models. Please confirm availability.

PRODUCTS

OUTDOOR POWER EQUIPMENT




-  Double Insulation
-  Brake
-  Torque Limiter
-  Electronic 2-Speed
-  Soft Start
-  Anti Vibration
-  Automatic Oiling
-  Chain Brake
-  Primer Pump
-  Capacitor Discharge Ignition
-  Electronic Ignition
-  Dust Collection
-  Decompression Valve
-  Auto Decompression
-  Rapid Start

DUB186Z

Cordless Blower



- Long blowing nozzle with curved tip for optimal blowing performance
- 3 Air volume setting (high/medium/low)
- Variable speed (0-18,000 RPM) for optimum speed control
- Ergonomically designed handle with rubberised soft grip
- Optimum grip-to-frame angle



No Load Speed (RPM)	0-18,000
Blowing Force	2.5 N
Continuous Use	w/ BL1850B High / Med / Low 20/ 50/ 130 min w/ BL1830B High / Med / Low 12 / 30/ 80 min
Dimensions (L x W x H)	861 x 156 x 210 mm
Net Weight	1.6 - 2.1 kg

*Cannot be used as vacuum cleaner

DUB184Z

Cordless Blower



- Ideal for clearing fallen leaves on pavement, grass and hedge clippings or other light debris
- Variable speed control by trigger, with cruise control lever for lock-on operation
- BL motor delivers up to 52.1 m/s and 13.0 m³/min
- Compact and lightweight for single handed operation




No Load Speed (RPM)	0 - 18,000
Blowing Force	10.9 N
Max Air Volume	13.0 m³/min (459 CFM)
Max Air Velocity	52.1 m/s (116 MPH)
Continuous Use	w/ BL1860B: 12 min w/ BL1850B: 10min
Dimensions (L x W x H)	825 x 160 x 285 mm
Net Weight	2.5 - 3.0 kg

DUB361Z

Cordless Blower



- Delivers up to 100 minutes of run time using two 6.0Ah 18V LXT batteries on low speed setting
- Motor produces a maximum air velocity of 93 m/s
- 2-Speed (10,000 & 17,000 RPM) design for optimum speed control
- Compact and lightweight for single handed operation
- Push button air volume selection (High / Low settings)



Max Air Volume	High: 4.4 m³/min (155 CFM) Low: 2.6 m³/min (92 CFM)
Max Air Velocity	High: 93 m/s (208 MPH) Low: 57 m/s (128 MPH)
No Load Speed (RPM)	High: 17,000 Low: 10,000
Sound Pressure Level	82.3 dB(A)
Sound Power Level	94.7 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	905 x 141 x 194 mm
Net weight	3.1 - 3.2 kg

DUB362Z

Cordless Blower



- Our most powerful cordless blower yet: Amazing 54 m/s and 13.4 m³/min operation
- Delivers up to 28 minutes of run time at 15,800 RPM using two 18V LXT 5.0Ah batteries
- 6-Stage air velocity/volume selection dial with variable speed control trigger
- 3-Stage telescopic long nozzle with adjustment range of 100 mm for user convenience
- Compact and lightweight for single handed operation



Max Air Volume	13.4 m³/min (473 CFM)
Max Air Velocity	54 m/s (120 MPH)
Blowing Force	14.4 N
Load Speed (RPM)	11,400 - 21,500
Sound Pressure Level	79.1 dB(A)
Sound Power Level	93.5 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	830 x 880 x 930 mm
Net weight	3.5 - 4.2 kg

DUC302Z

Cordless Chain Saw



- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions
- "Tool-less" chain adjustment for convenient operation and maintenance
- Kickback brake & electric brake for maximum operator safety



Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	8.3 m/s (500 m/min) (1,650 FPM)
Chain Oil Tank Volume	85 mL (2.9 US oz)
Sound Pressure Level	84.4 dB(A)
Sound Power Level	95.4 dB(A)
Vibration Level	Cutting Wood: 6.3 m/s²
Dimensions (L x W x H)	600 x 234 x 198 mm
Net weight	4.7 kg

* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.

DUC400Z

18V X2 (36V) LXT BL 400mm Brushless Cordless Chain Saw

Cordless Chain Saw



- Two 18V LXT Li-Ion batteries deliver power and performance without leaving the 18V LXT platform
- Low noise level and zero emissions



Guide Bar Length	400 mm (16")
Chain Pitch	370 mm (14-1/2")
Chain Gauge	3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min)
	(0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL
Sound Pressure Level	87.7 dB(A)
Sound Power Level	100.4 dB(A)
Vibration Level	Cutting Wood: 5.3 m/s ²
Dimensions (L x W x H)	443 x 215 x 235 mm w/o guide bar
Net weight	4.6 - 5.5 kg


DUA301Z

18V X 2 (36V) LXT BL AFT 300mm Cordless Telescopic Pole Saw

Cordless Telescopic Pole Saw



- High power BL motor delivered the same or higher operation efficiency than 30 cc class engine models
- Torque boost mode raises the current limit temporarily for easy cutting of trunks or thick limbs
- Lightweight pole saw head for easy access to the desire cutting position and reduced operator fatigue
- Ideal for pruning and limbing in tall trees or hard-to-reach areas



Guide Bar Length	300 mm (12")
Recommended Guide Bar Length	250 - 300 mm (10- 12")
Max Cutting Length	300 mm (12")
Saw Chain	Gauge:
	1.1/1/3 mm (0.043 / 0.050")
	Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 = 1,200 m/min)
	(0 - 3,940 FPM)
Oil Tank Capacity	160mL
Dimensions (L x W x H)	w/ Guide Bar & Saw Chain
	2,826- 4,002 x 155 x 191 mm
Net weight	6.1 - 6.9 kg

DJR183Z

18V LXT Li-Ion Cordless Pruning/ Recipro Saw

Cordless Pruning/Recipro Saw



- Variable speed (0 - 3,000 SPM) combined with a 13 mm (1/2") stroke length
- Dual-position on/off switch allows for either paddle or trigger switch operation
- Toolless blade change system allows for faster blade installation and removal
- Compact design at 392 mm long; lightweight for convenient operation
- Built-in LED light illuminates the work area



Capacity	Pipe : 50 mm (2")
	Wood: 50 mm (2")
Length of Stroke	13 mm (1/2")
Vibration Level	Cutting Boards: 8.0 m/s ²
	Cutting Wooden Beams: 7.0 m/s ²
Strokes Per Minute (SPM)	0-3,000
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	392x81x209 mm
Net Weight	1.5 - 1.7 kg


DUR193Z

18V LXT Li-Ion Cordless Grass Trimmer, Loop Handle

Cordless Grass Trimmer



- A compact and handy line trimmer for trimming and finishing of small gardens
- Equipped with an adjustable telescopic shaft.



Cutting Width	Nylon Cutting Head: 260mm (10-1/4")
No Load Speed (RPM)	7,800
Sound Pressure Level	73.2 dB(A)
Sound Power Level	83.1 dB(A)
Vibration Level	Left/Right: 2.5/ 2.5 m/s ² or less
Dimensions (L x W x H)	1248 - 1436 x 265 mm
Maximum Run Time(min)	w/BL 1830B:45
Net Weight	2.3-2.6 kg

DUR190LZX3

18V LXT Li-Ion Cordless 3-Speed Grass Trimmer, Loop Handle

Cordless Grass Trimmer



- One protector for metal blade / plastic blade / trimmer head
- Toolless shaft lock for plastic blade change
- The guard integrated with receive washer minimizes weed winding
- Soft grip of ergonomic design



Cutting Width	Nylon Cutting Head: 300 mm (11-3/4")
	Metal Blade: 230 mm (9")
	Plastic Blade: 255 mm (10")
No Load Speed (RPM)	3,500 - 6,000
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1,836 x 348 x 236 mm
Net weight	2.9 - 3.2 kg

DUR192L

18V LXT BL Brushless Cordless 2-Speed Grass Trimmer, Loop Handle

Cordless Grass Trimmer



- 2-Speed options (Low: 4,500 RPM, High: 6,000 RPM) allows the operator to match speed to application



Cutting Width	Nylon Cutting Head: 300 mm
No Load Speed (RPM)	High / Low: 0 - 6,000 / 0 - 4,500
Spindle Size	M10 x 1.25 LH
Max Run Time	w/BL 1850B : High / Low: 46 / 97 min
Dimensions (L x W x H)	1795 x 186 x 246 mm
Net Weight	2.3 - 2.6 kg

*Standard with nylon cutting head

DUR368AZ

Cordless Grass Trimmer



18V X2 (36V) LXT BL Brushless Cordless 3-Speed Grass Trimmer, Bike Handle

- Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance
- Active Feedback sensing Technology (AFT) turns the motor off if blade rotation is suddenly forced to stop
- Outer Rotor BL Brushless Motor direct-drive system provides high power and increased torque
- Constant speed control minimizes reduction in rotation speed under load



LXT BL MOTOR ADT AFT XPT



Cutting Width	Metal Blade: 230 mm (9")
	TCT Saw Blade: 255 mm (10")
	Nylon Cutting Head: 350 mm (13-3/4")
	Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low: 6,500 / 5,300 / 3,500
Spindle Size	M10 x 1.25 LH
Sound Pressure Level	4-Tooth Blade: 74.7 dB(A)
Sound Power Level	4-Tooth Blade: 89.2 dB(A)
Sound Pressure Level	Nylon Cutting Head: 76.4 dB(A)
Sound Power Level	Nylon Cutting Head: 89 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	1,758 x 615 x 442 mm
Net weight	4.1 - 4.75 kg

*Standard with nylon cutting head.

DLM382DZ

Cordless Lawn Mower



18V X2 (36V) LXT Li-Ion Cordless 38cm (15") Lawn Mower

- Two 18V LXT Li-Ion batteries deliver the power and run time for corded demands without leaving the 18V LXT platform
- Grass box with grass level indicator
- XPT (eXtreme Protection Technology) dust and drip-proof performance is enhanced for use in bad weather



LXT XPT



Cutting Width	380 mm (15")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,700
Actual mowing area	w/BL1860B x 2 : 569 m ²
on a full battery charge	
Continuous run time	w/BL1860B x 2 : 35 min.
on a full battery charge	
Dimensions (L x W x H)	1,380-1,410x450x985-1,005 mm
Net weight	16.2 - 16.9 kg

DUH523Z

Cordless Hedge Trimmer



18V LXT Li-Ion Cordless Hedge Trimmer

- Delivers 2,700 strokes per minute (SPM)
- 52 cm (20-1/2") blade
- Improved soft grip design for maximum user comfort
- Anti-vibration structure
- Lower noise level at only 77 dB(A)



18V

Blade Length	520 mm (20-1/2")
Strokes Per Minute (SPM)	2,700
Tooth Spacing	26 mm (1")
Sound Pressure Level	77 dB(A)
Sound Power Level	84.3 dB(A)
Vibration Level	2.5 m/s ²
Dimensions (L x W x H)	938 x 195 x 193 mm (3.0 - 3.4 kg)
Net Weight	

DUH651Z

Cordless Hedge Trimmer



18V X2 (36V) LXT Li-Ion Cordless Hedge Trimmer

- Two 18V LXT Li-Ion batteries deliver the power and performance for corded demands without leaving the 18V LXT platform
- Motor delivers 3,600 SPM for faster cutting
- 6 speed dial (2,000 - 3,600 SPM) allows the user to match the speed to the application



XPT



Blade Length	650 mm (25-1/2")
Strokes Per Minute (SPM)	2,000 - 3,600
Tooth Spacing	36 mm (1-7/16")
Sound Pressure Level	82 dB(A)
Sound Power Level	91.1 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	1,135 x 225 x 200 mm
Net weight	4.7 - 5.5 kg

DUN461WZ

Cordless Pole Hedge Trimmer



18V LXT Cordless 46cm (18-1/8") Pole Hedge Trimmer

- Angle adjustable hedge trimmer head, 60° Tilt-up to 75° tilt-down from the horizontal position
- Can be folded in the 180° position for easy transport and storage
- Built-in clutch works to stop the blade motion even if the throttle lever is touched during folding operation
- 10 angle settings, the angle of hedge trimmer head can be changed simply by pushing a button



XPT LXT

18V

Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Tooth Spacing	28 mm (11/16")
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 134 mm
Net Weight	3.0 - 3.3 kg

Live Green & Grow Strong

* Unless otherwise indicated, although 18V Li-Ion tools are portrayed with a battery, they are sold as tool only without battery and charger. This allows you to make up the most cost effective set of tools, batteries and chargers to suit your needs.

* There is limited stock on some of the models. Please confirm availability.



INDUSTRIAL POWER TOOL CATALOGUE

ADT Automatic Torque Drive Technology

AFT Active Feedback Sensing Technology

- Anti Vibration
- Auto Firing Stop
- Automatic Oiling
- Brake
- Bevel Cutting
- Bevel Cutting L45 R5
- Bevel Cutting 45 R
- Built-in Light
- Capacitor Discharge Ignition
- Carrying Case
- Chain Brake

AVT Anti Vibration Technology

SJS Super Joint System

- Constant Speed
- Depth Adjusting
- Double Insulation
- Dust Collecting
- Electronic 2-Speed
- Electronic 3-Speed
- Electronic 4-Speed
- Hex Shank

DXT Deep and Exact Cutting Technology

SJSII Super Joint System II

- Hook & Loop
- Jig Saw blade - Bayonet Shank
- Keyless Chuck
- Laser Marker
- Mechanical 2-Speed
- Orbital Cutting
- Prime Pump
- Rapid Start

XPT Extreme Protection Technology

- Reversing
- Revolving Hose
- SDS-plus
- SDS-max
- Single / Sequential Firing
- Soft Start
- Static Free Hose
- Torque Limiter
- Torque Setting 16
- Torque Setting 18
- Torque Setting 20
- Torque Setting 21
- Variable Speed



a member of the **Hudaco** group

FOR WHOLESALE TRADE ENQUIRIES ONLY

CAPE TOWN **DURBAN** **JOHANNESBURG**
 TEL: (021) 932-0568 TEL: (031) 717-6400 TEL: (011) 878-2600
 FAX: (021) 932-2762 FAX: (031) 709-1928 FAX: (011) 873-5010

www.makita.co.za

DEALER STAMP

Like us on
Facebook
<http://facebook.com/MakitaPowerToolsSA>

GUARANTEE: These machines have been thoroughly inspected and tested before leaving the factory and are guaranteed against defective workmanship and materials. Should any problems develop the complete machine must be returned to an Authorised Makita Service Centre. This guarantee does not apply where repairs have been made or attempted to be made to the machine by unauthorised persons and/or as a result of normal wear and tear, and/or of the machine has been abused or used for any purpose other than its intended specified use having regard to the capacity thereof. Nothing contained in this guarantee shall deprive the manufacturer and/or supplier on the one hand, and the consumer or customer on the other hand, of any rights or obligations they may have under and in terms of the Consumer Protection Act 68 of 2008 and any Regulations and amendments pertaining thereto from time to time ("the Act"), insofar as the Act may be applicable to the manufacture, sale and/or supply and purchase of the machine.

Please note: Manufacturer reserves the right to change specifications of parts and accessories without notice. Standard equipment and specifications of parts may vary in accordance with specifications issued in various countries.

This catalogue replaces the Makita Power Tool Catalogue dated 2023/2024 edition and all previous Makita Tool Catalogues. Rutherford is not responsible for printing errors (E&OE).