




5903RK & 5143R

235mm & 355mm Circular Saws

5903RK 2 000W

5143R 2 200W

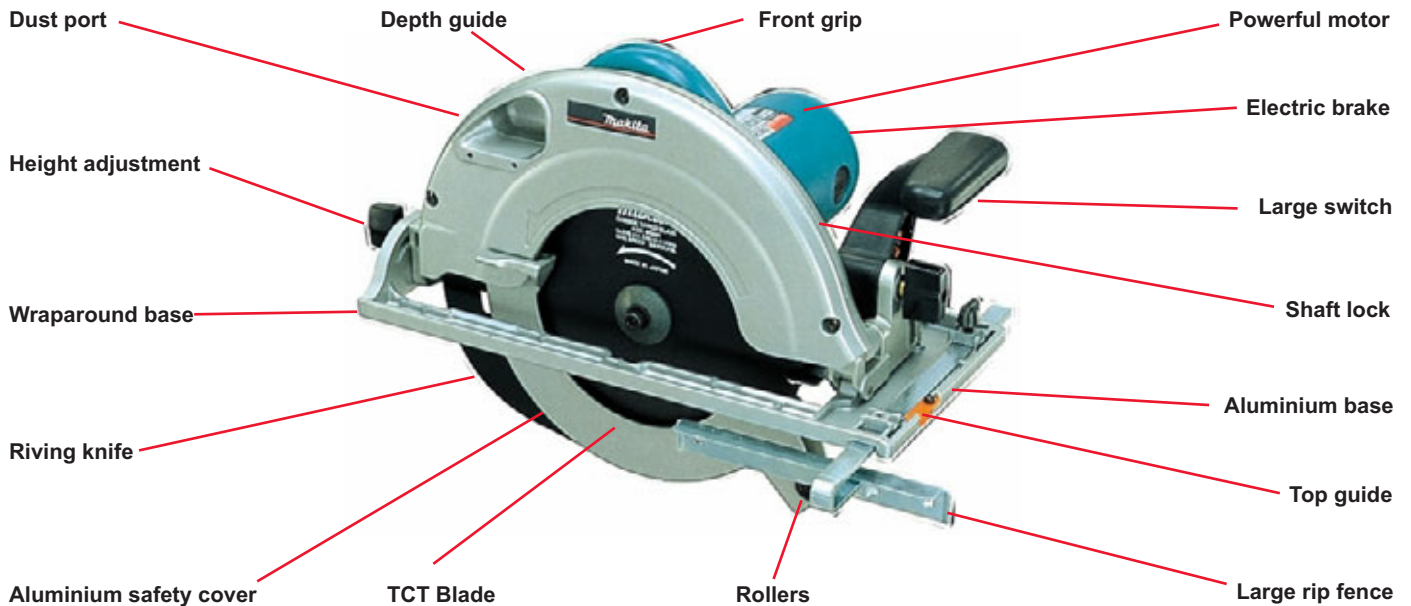

MAKITA ADVANTAGE

- Large dust ejection port for smooth chips and sawdust outflow. Readily accepts joint for dust collection.
- Sturdy aluminium depth guide keeps saw blade parallel with base.
- Large comfortable front grip.
- High powered Makita motor.
- Equipped with electric brake for safe quick stops.
- Large, easy to operate switch
- Shaft lock feature for quick and easy blade replacement
- Sturdy aluminium base assures greater accuracy and smooth working
- Adjustable top guide for aligning the cutting line.
- Aluminium safety cover with roller allows smooth feeding and prevents score marks on material surface.
- 235mm carbide-tipped saw blade.
- Anti-kickback riving knife.
- Heavy gauge aluminium wraparound base with easy-to-read measurements.
- Quick-lock height adjustment.

SPECIFICATIONS:	5903RK	5143R
Blade diameter	235mm	355mm
Maximum cutting capacity		
At 90°	85mm	130mm
At 45°	64mm	90mm
No load speed	4 500 r/min	2 700 r/min
Continuous rating input	2 000W	2 200W
Overall length	400mm	607mm
Net weight	7.2kg	14.0kg
Power supply cord	2.5m	5m
Carbon brush	AC203	AC203

FEATURES:	5903RK	5143R
	Double insulation, Dust collection, Electric brake, Soft start and Carry case	Double insulation, Dust collection, Electric brake & Soft start

STANDARD EQUIPMENT:

Rip fence	Yes	Yes
Hex wrench	Yes	Yes
Carbide tipped saw blade	235- 20T	355-20T
Joint assembly		Yes

OPTIONAL ACCESSORIES

Description	Part No.	Part No.
Combination blade	A-81468	
Blade for cross cutting	A-80341	
Chisel tooth blade		792099-6
Blade for ripping		A-80014
Guide fence	165084-6	



Photographs : Model 5903RK