



Cordless Impact Wrench DTW285ZK 12.7 mm


18V
LITHIUM-ION

Satisfy Professional's Needs

LXT
LITHIUM-ION

Reverse rotation auto stop mode

This mode works only with pulling the trigger fully in counterclockwise rotation. When the bolt/nut gets loosened enough, the tool stops the impact and rotation in 0.2 seconds.

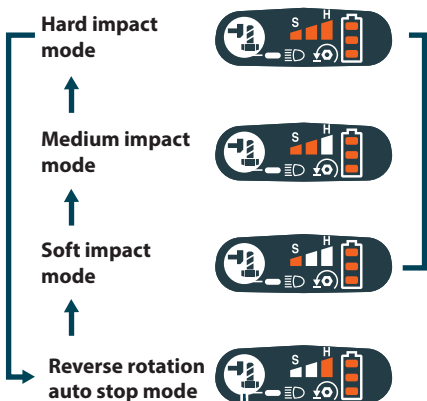

Pushing a button

Battery fuel gauge

Electronic 3 stage
impact power
selection

Compact design with a short overall length of 147mm

Phosphorescent bumper

Hammer case cover
securely fastened with
four bolts

BL
MOTOR

LED Job light with
preglow and afterglow
functions

Variable speed
control by trigger

Ergonomically
designed handle with
soft grip
provides comfortable grip and
more control while minimizing
hand fatigue and pain.

Belt clip



Photo: DTW285ZK

XPT
EXTREME PROTECTION TECHNOLOGY

Powered by Makita Li-ion batteries - Sold Separately

with Battery fuel gauge *without Battery fuel gauge

DTW285ZK:



BL1860B (6.0Ah)
BL1850B (5.0Ah)
BL1840B (4.0Ah)
BL1830B (3.0Ah)
BL1820B (2.0Ah)
*BL1815N (1.5Ah)

Fast charger
DC18RC



Maximum Fastening torque



Cordless Impact Wrench DTW285ZK 12.7 mm

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

Fastening Capacities

Square Drive

No Load Speed (RPM)

Impacts Per Minute (IPM)

Max Fastening Torque

Vibration Level

Sound Pressure Level / Sound Power Level

Dimensions (L x W x H)

Net weight

Standard Bolt: M10 - M20, High Tensile Bolt: M10 - M16

12.7 mm

Hard / Medium / Soft: 0 - 2,800 / 0 - 2,100 / 0 - 1,600

Hard / Medium / Soft: 0 - 3,500 / 0 - 2,600 / 0 - 1,800

280 N·m

Impact tightening of fasteners of the maximum capacity of the tool: 11.5 m/s²

96 dB(A) / 107 dB(A)

147x79x249mm

BL1815N: 1.5 kg, BL1860B: 1.7 kg

Tool does not come with socket.

Tool does not come with battery or charger!